

Basic Line Torque Sensor

Type 4520A...

Rotating with Contactfree Signal Transmission

Torque sensors Type 4520A... operate on the strain gage principle and supply an analog output signal of $\pm 0 \dots 10$ VDC that is transmitted without contact.

- Measuring ranges from 1 ... 1 000 N·m
- Speed up to 10 000 1/min
- High frequency response
- Maintenance-free thanks to contactfree signal transmission
- Shaft end
- Integral speed measurement
- Great value for money

Description

The robust torque sensor Type 4520A... for measuring torque on rotating shafts offers particularly good value for money and is recommended primarily as an entry-level solution for torque measurement. Frequency modulation is used to transmit the torque signal from the rotating shaft without contact and convert it into an analog signal. The speed signal at 60 pulses/rev. is available as TTL signal level. An external electrical control input is provided as standard.

Applications

Type 4520A... is suitable for static and dynamic measurement of torques in assembly and for quality control in production and the laboratory.

Technical Data

Basic Mechanical Data

Measuring range	N·m	1 ... 1 000
Rated torque M_{nom}	N·m	1 ... 1 000
Overload capacity		
Alternating torque		1 x M_{nom}
Maximum		1,5 x M_{nom}
Speed measurement	pulses/rev.	60
Rated speed		
1 ... 10 N·m	1/min	10 000
20 ... 200 N·m	1/min	8 000
500 ... 1 000 N·m	1/min	7 000
Case material		anodized Al
Degree of protection		IP40



General Electrical Data

Cut-off frequency -3 dB	kHz	1,5
Accuracy class		0,5
Linearity error		
including hysteresis	% FSO	< $\pm 0,5$
Output signal	VDC	$\pm 0 \dots 10$
at M_{nom} (rated)	VDC	10
Load resistance	k Ω	>10
Thermal zero drift	% FSO/10 °C	< $\pm 0,3$
Thermal sensitivity shift	% FSO/10 °C	< $\pm 0,3$
Control signal	%	100 $\pm 0,5$
100 % control input	VDC	"On" 5 ... 30 "Off" 0 ... 2
Operating temperature range (rated)	°C	10 ... 60
Service temperature range	°C	0 ... 70
Storage temperature range	°C	-25 ... 80
Electrical connection		built-in 12 pin connector
Supply voltage	VDC	18 ... 26
Power consumption	W	<2

4520A_000-765e-10.16

Torsional Rigidity and Inertia

Measuring range N·m	Torsional rigidity N·m/rad	Angle of twist at M_{nom}	Inertia kgcm ²		Weight kg
			Measuring end	Drive end	
1	330	0,17	0,0152	0,0145	0,5
2	330	0,34	0,0152	0,0145	0,5
5	855	0,34	0,0157	0,0148	0,52
10	855	0,67	0,0157	0,0148	0,52
20	8 690	0,13	0,44	0,47	1,35
50	8 690	0,33	0,44	0,47	1,35
100	19 800	0,29	0,493	0,527	1,5
200	19 800	0,58	0,493	0,527	1,5
500	165 560	0,17	3,56	3,09	3,3
1 000	165 560	0,35	3,56	3,09	3,3

Dimensions

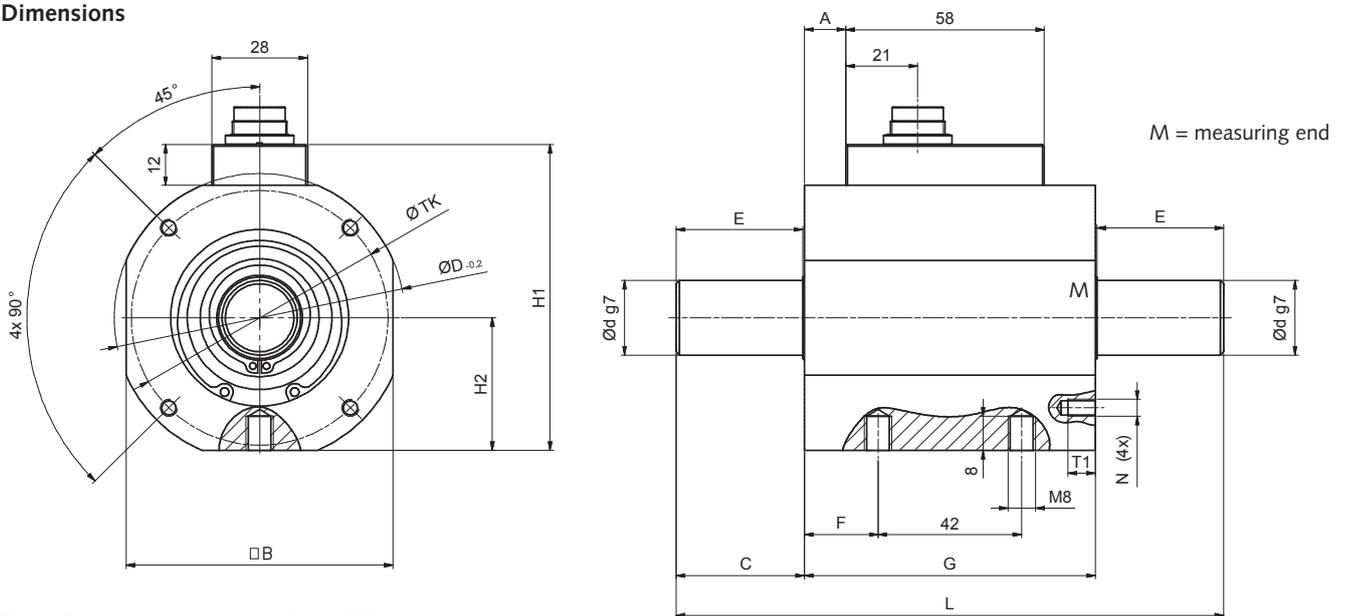



Fig. 1: Dimensions torque sensor Type 4520A...

Size	1	2	2	3
Rated torque N·m	1 ... 10	20 ... 50	100 ... 200	500 ... 1 000
A	0	12	12	11
B	58	78	78	91
C	16	27,5	37,5	59
ØD	65	85	85	98
Ød g7	10	18	22	42
E	15	27	37	58
F	8	21,5	21,5	19
G	58	85	85	80
H1	70	90	90	103
H2	29	39	39	45,5
L	90	140	160	198
N	M4	M5	M5	M6
T1	7	8	8	10
ØTK	48	75	75	85

4520A_000-765e-10.16

Electrical Connections

Pin Allocation of Built-in 12 pin Connector

	Function	PIN	Description	
	Supply	F E	+U _B GND 18 ... 26 VDC, power consumption <2 W Reference for U _B and speed signal	
	Shield	M	In sensor; connected to case	
	Torque output	C	U _A	±10 VDC at M _{nom} at >2 kΩ 10 VDC at control signal resolution R _{i,C} = 10 Ω, output with short-circuit protection connection to AGND
		D	AGND	Reference for U _A
	Speed sensor	B	Track A	Open collector output Internal 1 kΩ resistance to 5 VDC (pull up), TTL-level
	100 % control input	K	Control	Off: 0 ... 2 VDC On: 5 ... 30 VDC
		A	KGND	Reference for control
		G		Reserved
		H		Reserved
		J		Reserved
		L		Reserved

Included Accessories

- None

Optional Accessories	Type	Mat.-No.
Female cable connector with solder lug 12 pin	KSM000703	18008371
Connecting cable, length 5 m, 12 pin – flying leads	KSM124970-5	18008943
Connecting cable, length 2,5 m, 12 pin – CoMo Torque	KSM185380-2,5	18008963
Control Monitor CoMo Torque evaluation instrument for torque sensors (see data sheet 4700B_000-944)	4700B...	
Connecting cable, length 5 m 12 pin neg. – 12 pin pos.	KSM072030-5	18008371

Ordering Key

Measuring Range in N·m

1	001
2	002
5	005
10	010
20	020
50	050
100	100
200	200
500	500
1 000	1K0

Type 4520A 

Ordering Example

Type 4520A010

Torque sensor: Rated torque 10 N·m: 010