

2

1

PCB Load & Torque Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Load and Torque Inc.

REVISIONS



REV	DESCRIPTION	ECO
A	ADDED NOTE - 12.10.24, PTE	55424

46138



4 CONDUCTOR BLACK SHIELDED CABLE 10.0 FT [3.0 M] LONG TERMINATING IN PIGTAILS (WESTERN REGIONAL WIRING)

STRAIN RELIEF

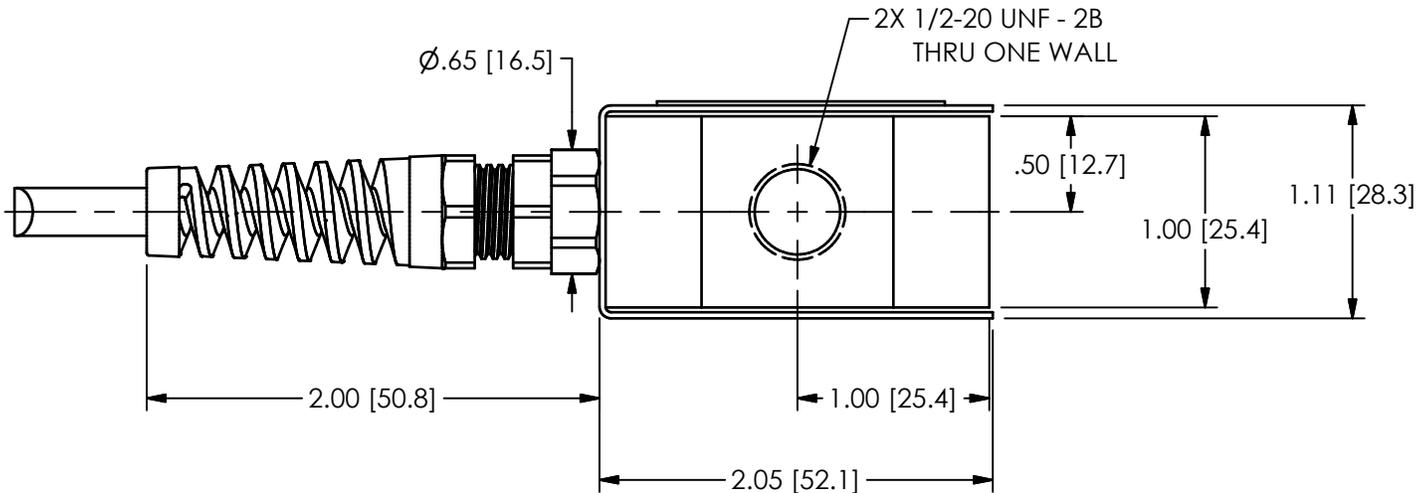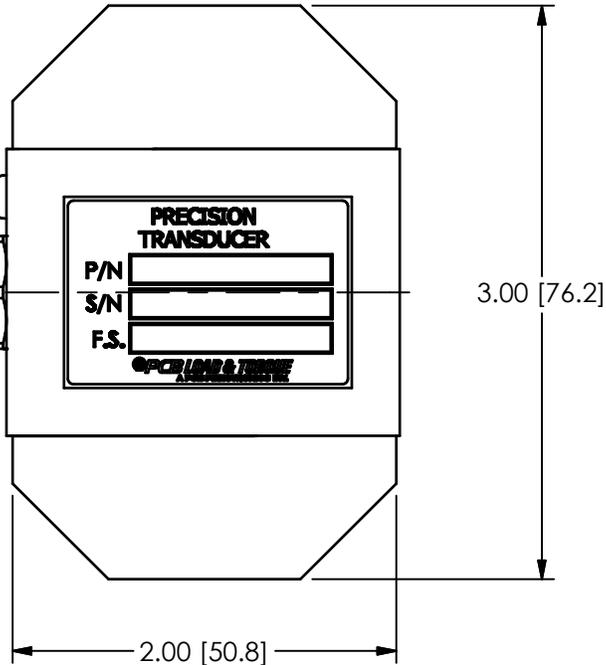

1 OPTIONAL CABLE TERMINATIONS AVAILABLE

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:

DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]
DECIMALS XX ±.01 XXX ±.005	DECIMALS X ±0.3 XX ±0.13
ANGLES ± .5 DEGREES	ANGLES ± .5 DEGREES
FILLETS AND RADII .015 MAX	FILLETS AND RADII 0.38 MAX

DRAWN		CHECKED		ENGINEER	
SMB	06.27.11	JM	06.27.11	JAM	6/27/11

TITLE
OUTLINE DRAWING
MODEL 1631 SERIES
S-CELL



24350 Indoplex Circle, Farmington Hills, MI 48335
(716) 684-0001 E-MAIL: linfo@pcbloadtorque.com

DWG. NO.
46138

SCALE: FULL SHEET 1 OF 1

2

1