

FUTEK MODEL QLA106


DONUT / THROUGH HOLE LOAD CELL

ITEM NUMBER: QSH01925




INCH [mm] | R.O. = Rated Output

WIRING CODE			
+ Excitation	- Excitation	+ Signal	- Signal
RED	BLACK	GREEN	WHITE
Shield			
FLOATING			

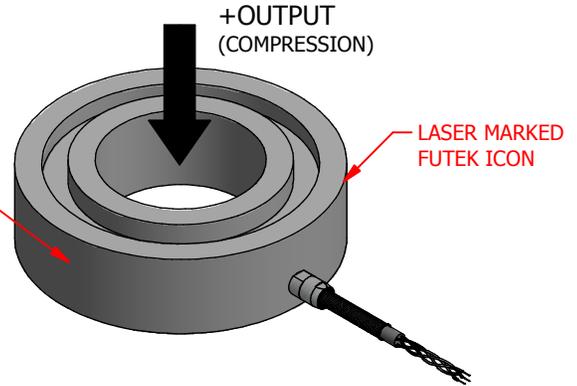

LASER MARKED
FUTEK LOGO
ITEM #
CAPACITY
S/N

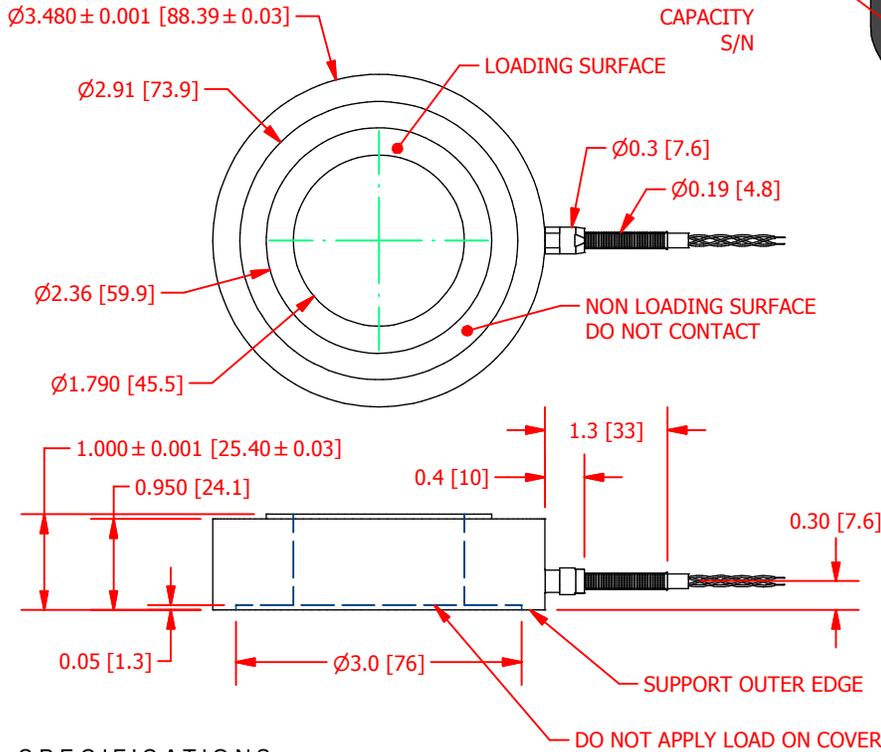

SPECIFICATIONS:

RATED OUTPUT	2 mV/V +/-1%.
CAPACITY	30000 lb. [133200N]
SAFE OVERLOAD	150 % of R.O.
ZERO BALANCE	±3% of R.O.
EXCITATION (VDC OR VAC)	18 MAX
BRIDGE RESISTANCE	700 Ω nom.
NONLINEARITY	±0.5% of R.O.
HYSTERESIS	±0.5% of R.O.
NONREPEATABILITY	±0.5% of R.O.
TEMP. SHIFT ZERO	±0.02% of R.O./°F (±0.036 of R.O./°C)
TEMP. SHIFT SPAN	±0.02% of LOAD/°F (±0.036 of LOAD/°C)
COMPENSATED TEMP.	60 to 160 °F (16 to 71 °C)
OPERATING TEMP	-60 to 200 °F (-51 to 93 °C)
WEIGHT (approx)	1.5 lb [680.3 g]
MATERIAL	17-4 PH S.S.
DEFLECTION	0.0005 [0.013] nom.
CABLE: #24 Awg 4 Conductor Braided Shielded Cable, 10 ft [1.5 m] Long	
CE COMPLIANCE	2011/65/EU

CUSTOMER APPROVAL- COMPANY:

OUTLINE DRAWING

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.
10 THOMAS, IRVINE, CA 92618 USA
Phone: (949) 465-0900
Fax: (949) 465-0905

CUSTOMER APPROVAL- NAME / DATE:

STANDARD NOTES: (Unless Otherwise Specified)


REVISIONS: (Refer to dwg # revision sheet)

ALL DIMENSIONS ARE IN INCHES
DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
THREADS PER HANDBOOK H-28
DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:
± 1/2°

CHAMFER:
± 5°

TOLERANCE:
.X ± 0.1"
.XX ± 0.01"
.XXX ± 0.005"



3rd ANGLE PROJ.

MODEL: **QLA106**

DWG No.: **FO1226-A**

DRAWN BY: T. LEE

CREATED DATE: 10/10/2008

APPROVED BY: R. WALKER

APPROVED DATE: 10/10/2008

CHECKED BY:

CAGE: 1X8M6 SHEET: 1 OF 1

A	7-6-17
---	--------