
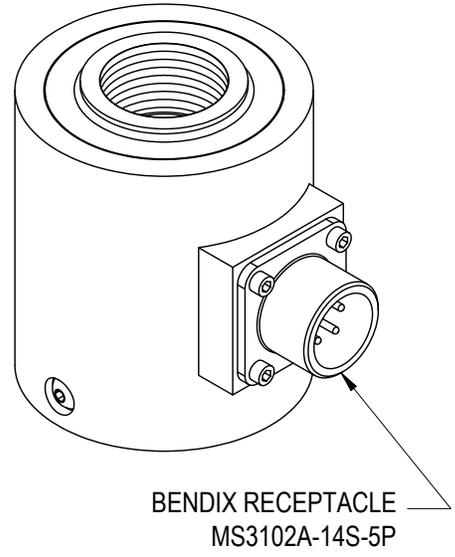
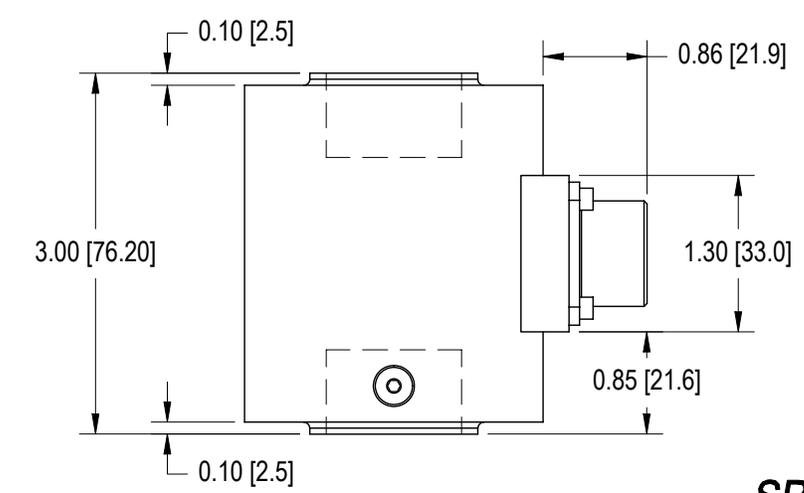
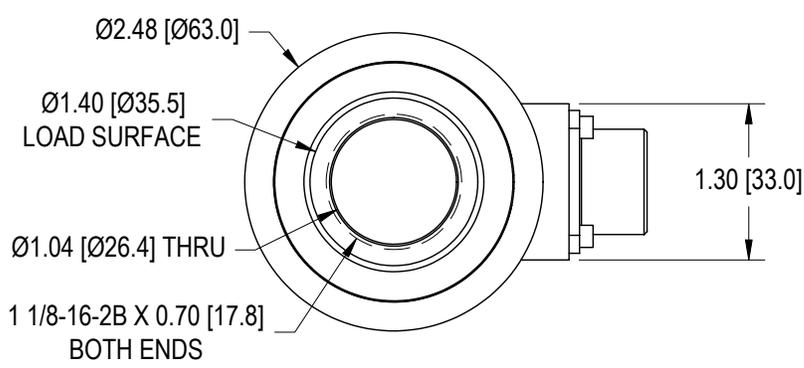


FUTEK MODEL QLA249

STOCK NUMBER: SEE CHART

Custom Thru Hole Load Cell

INCH (mm)		R.O.= Rated Output	
WIRING CODE			
+Excitation	-Excitation	+Signal	-Signal
PIN A	PIN B	PIN C	PIN D
N/C			
PIN E			

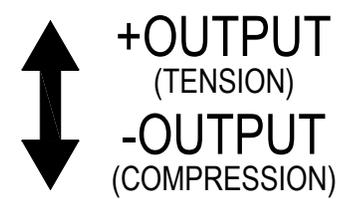

STK #	lb
QSH00638	2000
QSH00658	5000
QSH00661	10000

SPECIFICATIONS:

RATED OUTPUT	3 mV/V nom.
ZERO BALANCE	±1% of R.O.
EXCITATION	18 VDC MAX
BRIDGE RESISTANCE	350 Ω nom.
NONLINEARITY	±0.5% of R.O.
HYSTERESIS	±0.5% of R.O.
TEMP. SHIFT ZERO	±0.02% of R.O./°F (0.04% of R.O./°C)
TEMP. SHIFT SPAN	±0.02% of LOAD/°F (0.04% of LOAD/°C)
COMPENSATED TEMP.	60 to 160°F (15 to 72°C)
OPERATING TEMP.	-60 to 200°F (-50 to 93°C)
WEIGHT	0.5 lb
MATERIAL	ALUMINUM
CONNECTOR: 5 Pin Bendix Receptacle MS3102A-14S-5P	

MATERIAL:	—
HEAT TREATMENT - FINISH:	—
REVISIONS: (Refer to dwg # revision sheet)	
▲ 1-03-07	

OUTLINE DRAWING

STANDARD NOTES: (Unless Otherwise Specified)

- ALL DIMENSIONS ARE IN INCHES
- DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
- REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
- THREADS PER HANDBOOK H-28
- DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE: ±1/2°

CHAMFER: ±5°

TOLERANCE: .X ±0.1
.XX ±0.01
.XXX ±0.005

3rd ANGLE PROJ.

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.
10 THOMAS
IRVINE, CA 92618 USA
Phone: (949) 465-0900
Fax: (949) 465-0905

CAGE: 1X8M6	MODEL: QLA249	DWG No.: FO1111
DRAWN BY: H. AU	APPROVED BY: J. VARGAS	CHECKED BY: -
DATE: OCT. 13, 2005		