
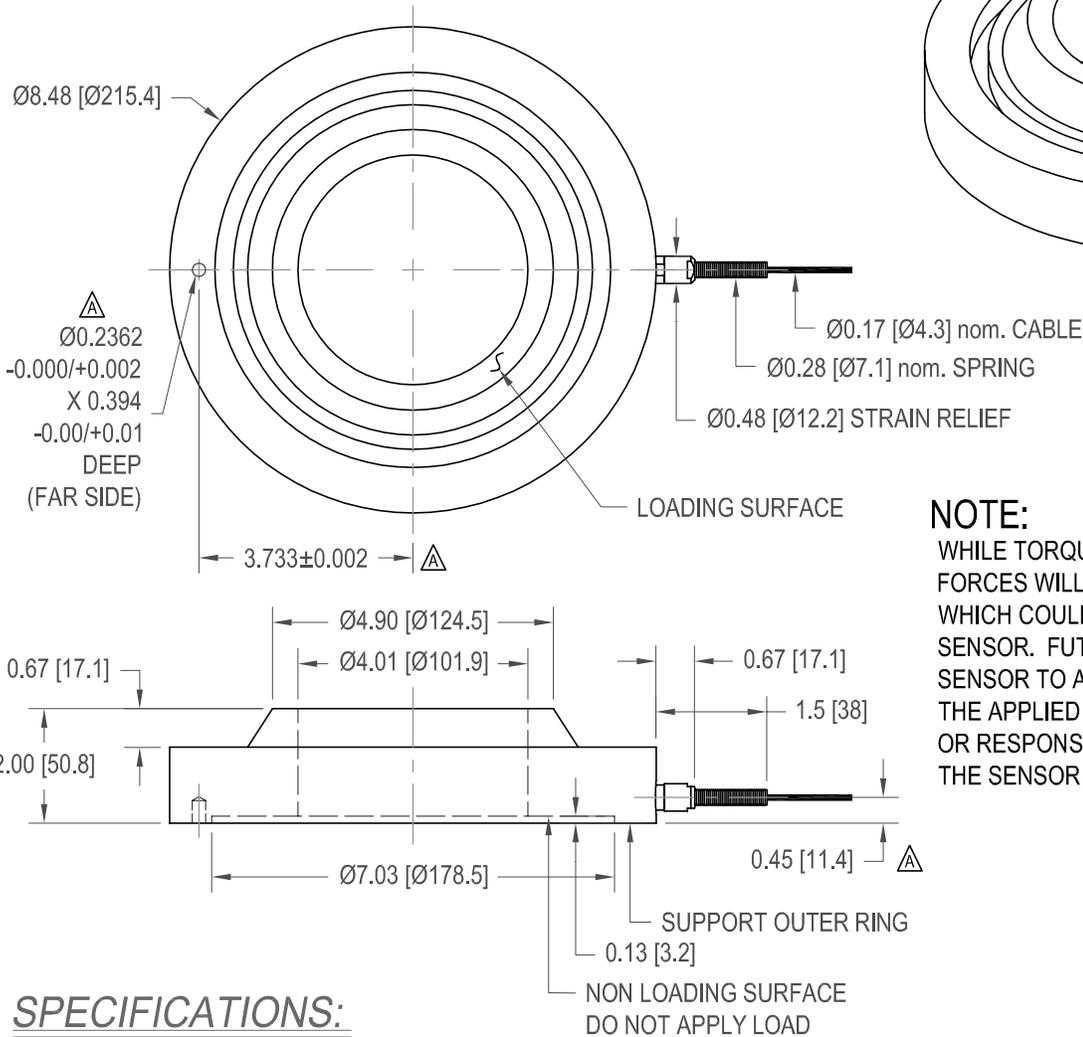


FUTEK MODEL QLA267 CUSTOM COMPRESSION LOAD CELL

STOCK NUMBER: QSH00763

INCH (mm)		R.O.= Rated Output	
WIRING CODE (WC1)			
+Excitation	-Excitation	+Signal	-Signal
RED	BLACK	GREEN	WHITE
+ Sense	- Sense	Shield	
ORANGE	BLUE	FLOATING	

+OUTPUT
(COMPRESSION)

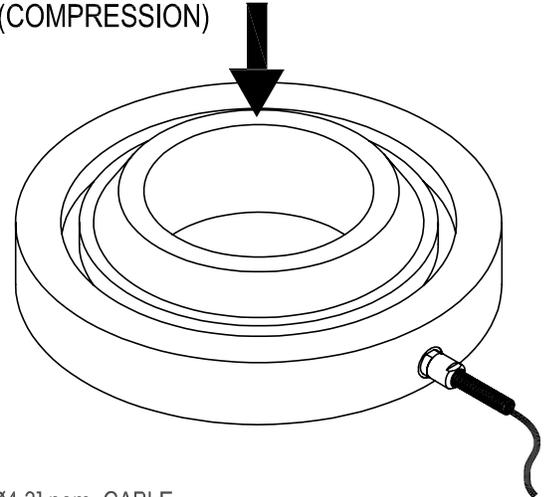

NOTE:

WHILE TORQUING BOLTS, HIGH TENSION FORCES WILL OCCUR DURING INSTALLATION, WHICH COULD RESULT IN OVERLOADING THE SENSOR. FUTEK RECOMMENDS CONNECTING SENSOR TO A SYSTEM IN ORDER TO MONITOR THE APPLIED FORCES. FUTEK IS NOT LIABLE OR RESPONSIBLE FOR THE MISHANDLING OF THE SENSOR DURING INSTALLATION.

SPECIFICATIONS:

RATED OUTPUT	2 mV/V nom.	TEMP. SHIFT ZERO	±0.02% of R.O./°F
CAPACITY	60K lbs Δ	TEMP. SHIFT SPAN	±0.02% of LOAD/°F
SAFE OVERLOAD	150% of R.O.	COMPENSATED TEMP.	60 to 160°F
ZERO BALANCE	±2% of R.O.	OPERATING TEMP.	0 to 200°F
EXCITATION (VDC OR VAC)	18 MAX	WEIGHT	16 lbs
BRIDGE RESISTANCE	Δ 700 Ω nom.	MATERIAL	STAINLESS STEEL
NONLINEARITY	Δ ±2% of R.O.	CABLE: #28 AWG, 6 Conductor Braided Shielded Polyurethane Cable, 10 ft.	
HYSTERESIS	Δ ±2% of R.O.		
NONREPEATABILITY	±0.5% of R.O.		

MATERIAL:	—
HEAT TREATMENT - FINISH:	—
REVISIONS: (Refer to dwg # revision sheet)	
Δ 6-15-06	
Δ 9-19-06	
Δ 11-15-06	

OUTLINE DRAWING

STANDARD NOTES: (Unless Otherwise Specified)

- ALL DIMENSIONS ARE IN INCHES
- DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
- REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
- THREADS PER HANDBOOK H-28
- DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:
±1/2°

CHAMFER:
±5°

TOLERANCE:
.X ±0.1
.XX ±0.01
.XXX ±0.005

3rd ANGLE PROJ.

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.
10 THOMAS
IRVINE, CA 92618 USA
Phone: (949) 465-0900
Fax: (949) 465-0905

CAGE: 1X8M6	MODEL: QLA267	DWG No.: FO1134
DRAWN BY: H. AU	CHECKED BY: J. VARGAS	
APPROVED BY: R. WALKER	DATE: JUN. 2, 2006	