


FUTEK MODEL QLA286

Tension & Compression In-line Load Cell w/ Center Cable Exit

STOCK NUMBER: SEE CHART

INCH (mm)		R.O.= Rated Output	
WIRING CODE (WC1)			
+Excitation	-Excitation	+Signal	-Signal
RED	BLACK	GREEN	WHITE
Shield			
FLOATING			

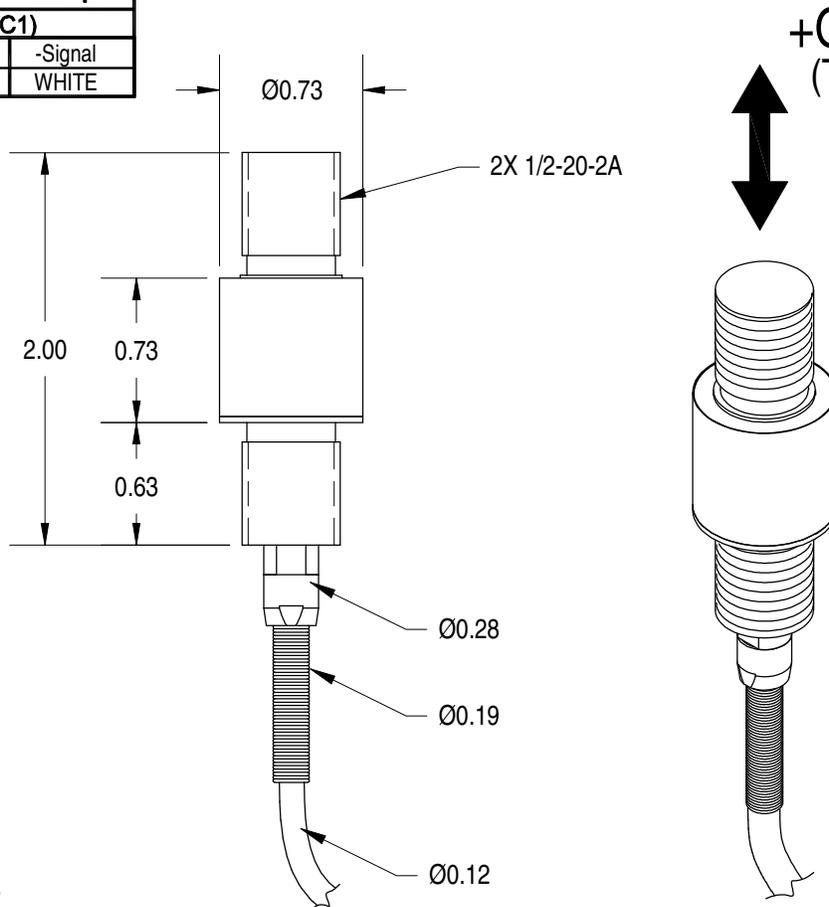

SPECIFICATIONS:

RATED OUTPUT	2 mV/V nom.
CAPACITY	3000 lb
SAFE OVERLOAD	150% of R.O.
ZERO BALANCE	±5% of R.O.
EXCITATION (VDC OR VAC)	18 MAX
BRIDGE RESISTANCE	350 Ω nom
NONLINEARITY	±2% of R.O.
HYSTERESIS	±2% of R.O.
NONREPEATABILITY	±0.5% of R.O.
TEMP. SHIFT ZERO	±0.02% of R.O./°F
TEMP. SHIFT SPAN	±0.02% of LOAD/°F
COMPENSATED TEMP.	60 to 160°F
OPERATING TEMP.	-40 to 200°F
MATERIAL	STAINLESS STEEL
CABLE: 26 AWG, 4 Conductor Braided Shielded Teflon Cable, (See Chart for Length)	

STOCK #	CABLE LENGTH
QSH00952	2 INCH
QSH00953	10 FT

MATERIAL:

—

HEAT TREATMENT - FINISH:

—

REVISIONS: (Refer to dwg # revision sheet)



OUTLINE DRAWING

STANDARD NOTES: (Unless Otherwise Specified)

- ALL DIMENSIONS ARE IN INCHES
- DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
- REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
- THREADS PER HANDBOOK H-28
- DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:
± 1/2°

CHAMFER:
± 5°

TOLERANCE:
.XX ± .01
.XXX ± .005

3rd ANGLE PROJ.



This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

10 THOMAS
IRVINE, CA 92618 USA
Phone: (949) 465-0900
Fax: (949) 465-0905

CAGE: 1X8M6

MODEL: QLA286

DWG No.: FO1180

DRAWN BY: R. WALKER

CHECKED BY: -

APPROVED BY: J. VARGAS

DATE: June 20, 2007