
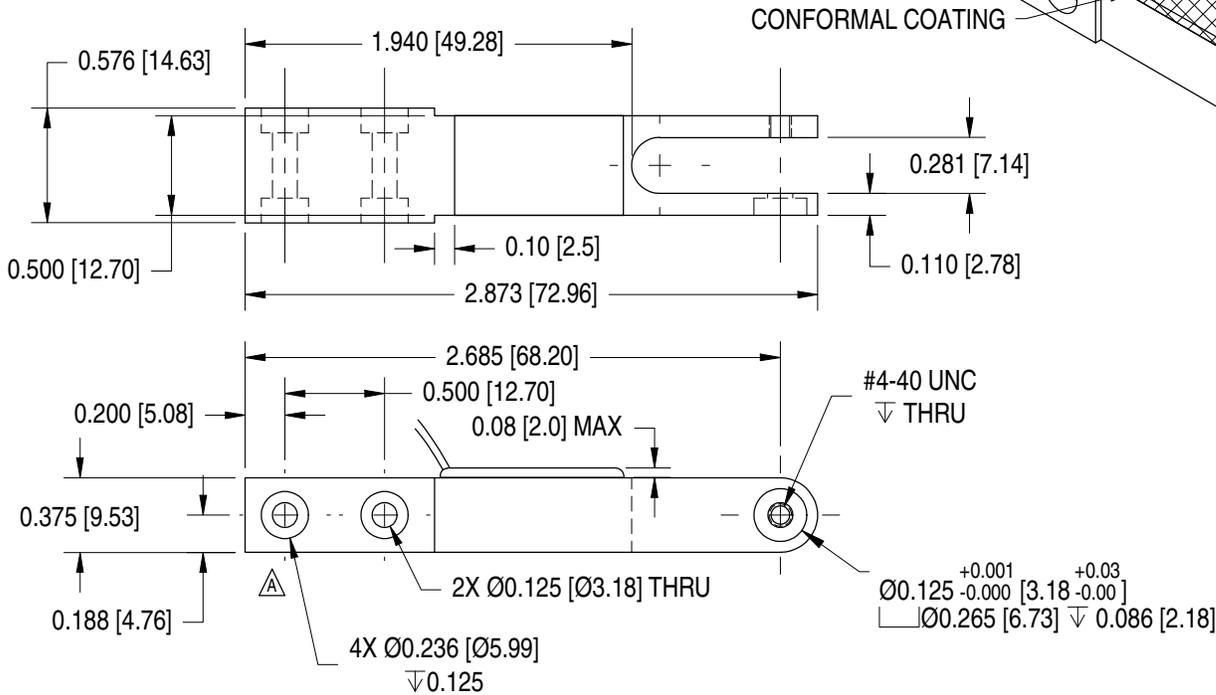


FUTEK MODEL QLA328 CUSTOM BENDING BEAM LOAD CELL, SIDE MOUNT

ITEM NUMBER: QSH01447

INCH [mm]		R.O.= Rated Output	
WIRING CODE			
+Excitation	-Excitation	+Signal	-Signal
RED	BLACK	GREEN	WHITE
Shield			
Floating			

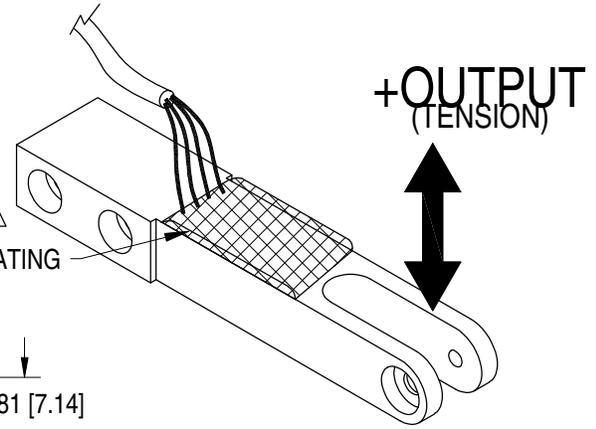

SPECIFICATIONS:

RATED OUTPUT	1 mV/V nom.
CAPACITY	18 lb [80 N]
SAFE OVERLOAD	150% of R.O.
ZERO BALANCE	±3% of R.O.
EXCITATION (VDC OR VAC)	15 MAX
BRIDGE RESISTANCE	1000 Ω nom
NONLINEARITY	±1% of R.O.
HYSTERESIS	±0.5% of R.O.
NONREPEATABILITY	±0.1% of R.O.
TEMP. SHIFT ZERO	±0.02% of R.O./°F (0.036% of R.O./°C)
TEMP. SHIFT SPAN	±0.02% of LOAD/°F (0.036% of LOAD/°C)
COMPENSATED TEMP.	60 to 160°F (15 to 72°C)
OPERATING TEMP.	32 to 200°F (0 to 93°C)
WEIGHT	approx 0.13 lbs (57 g)
MATERIAL	17-4 PH S.S.
CABLE: 29 AWG, 4 Conductor Spiral Shielded Silicone Cable, 2 ft Long	

CUSTOMER APPROVAL-COMPANY

OUTLINE DRAWING

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

10 THOMAS
IRVINE, CA 92618 USA
Phone: (949) 465-0900
Fax: (949) 465-0905

CUSTOMER APPROVAL-NAME /DATE

STANDARD NOTES: (Unless Otherwise Specified)

- ALL DIMENSIONS ARE IN INCHES
- DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
- REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
- THREADS PER HANDBOOK H-28
- DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:
±1/2°

CHAMFER:
±5°

TOLERANCE:
.X ±0.1
.XX ±0.01
.XXX ±0.005

3rd ANGLE PROJ.



CAGE: 1X8M6

MODEL: QLA328

DRAWN BY: A. Sata

APPROVED BY: R. Walker

DWG No: FO1277-A

CHECKED BY: -

DATE: Oct. 22, 2010

REVISIONS: (Refer to dwg # revision sheet)

10-28-10