
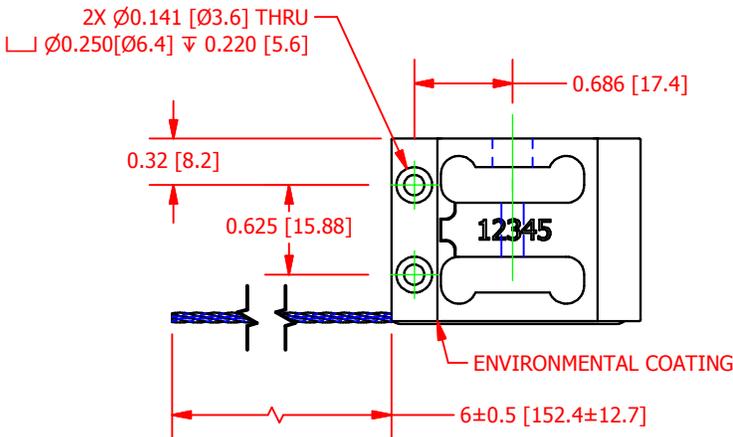
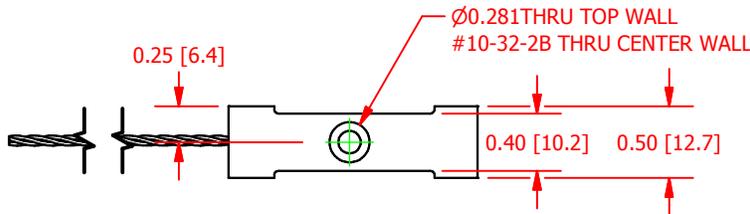
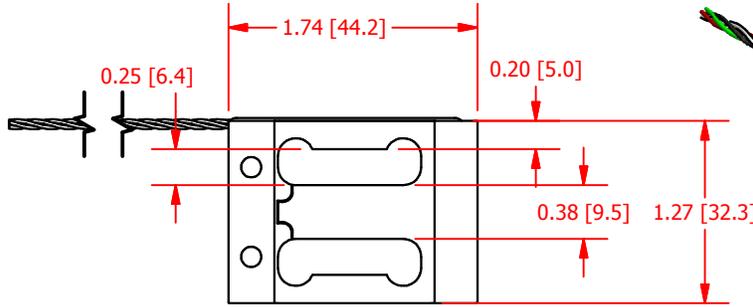


FUTEK MODEL QLA357

ITEM NUMBER: QSH01576

Parallelogram Load Cell w/ Overload Protection - RoHS Leadfree

INCH [mm]		R.O.= Rated Output	
WIRING CODE			
+ Excitation	-Excitation	+Signal	-Signal
RED	BLACK	GREEN	WHITE

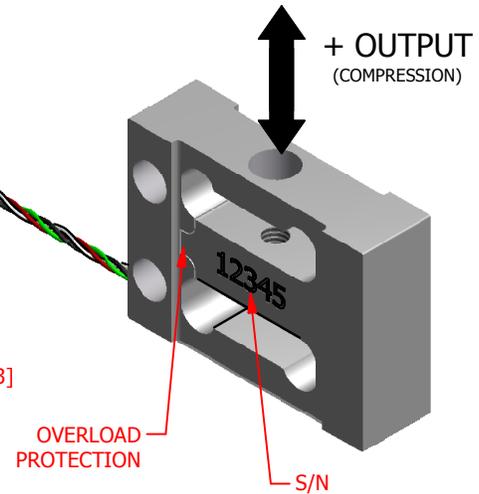

SPECIFICATIONS:

RATED OUTPUT	2 mV/V nom.
CAPACITY	5 lb [0.022kN]
SAFE OVERLOAD	250 lb
ZERO BALANCE	±2% of R.O.
EXCITATION (VDC OR VAC)	18 MAX
BRIDGE RESISTANCE	1000 Ω nom
NONLINEARITY	±0.1% of R.O.
HYSTERESIS	±0.1% of R.O.
NONREPEATABILITY	±0.1% of R.O.
TEMP. SHIFT ZERO	±0.005% of R.O./°F (±0.009 of R.O./°C)
TEMP. SHIFT SPAN	±0.005% of LOAD/°F (±0.009 of LOAD/°C)
COMPENSATED TEMP.	60 to 160 °F (16 to 71 °C)
OPERATING TEMP	0 to 160 °F (-18 to 71 °C)
WEIGHT (approx)	1.5oz
MATERIAL	Aluminum
CABLE: 29 Awg, 4 Conductor Spiral Teflon Cable, 6in Long	

CUSTOMER APPROVAL- COMPANY:

CUSTOMER APPROVAL- NAME / DATE:

REVISIONS: (Refer to dwg # revision sheet)

A	
---	--

OUTLINE DRAWING

STANDARD NOTES: (Unless Otherwise Specified)

ALL DIMENSIONS ARE IN INCHES
DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
THREADS PER HANDBOOK H-28
DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:
± 1/2°

CHAMFER:
± 5°

3rd ANGLE PROJ.
TOLERANCE:
.X ± 0.1"
.XX ± 0.01"
.XXX ± 0.005"



This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.
10 THOMAS, IRVINE, CA 92618 USA
Phone: (949) 465-0900
Fax: (949) 465-0905

MODEL: QLA357	DWG No.: FO1307
DRAWN BY: E. PANO	CREATED DATE: 12/23/2011
APPROVED BY: R. Walker	APPROVED DATE: 12/27/2011
CHECKED BY:	CAGE: 1X8M6 SHEET: 1 OF 1