

FUTEK MODEL QMA147

Custom Tri-Axial Bending Beam Load Cell with M2.5 Mounting



ITEM NUMBER: QSH02080

INCH [mm] | R.O.= Rated Output

WIRING CODE

+ Excitation	- Excitation	CH1 +Signal	CH1 -Signal
P1	P2	P3	P4
CH2 +Signal	CH2 -Signal	CH3 +Signal	CH3 -Signal
P5	P6	P7	P8

LASER MARKED ITEM # & S/N

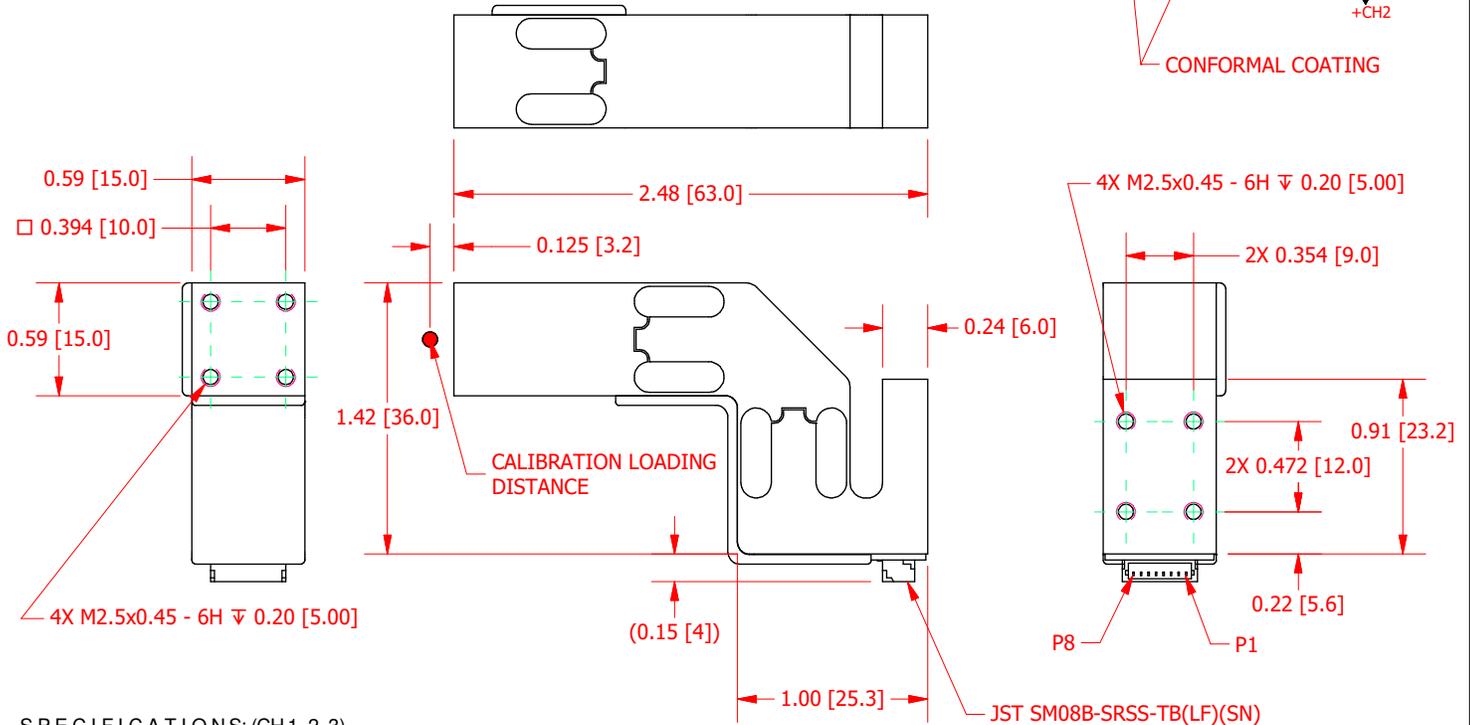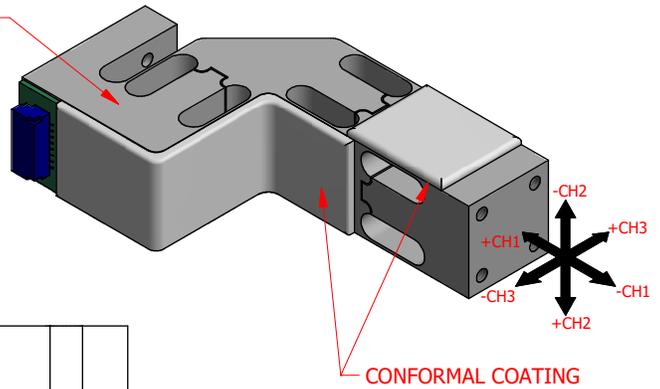

SPECIFICATIONS: (CH1, 2, 3)

RATED OUTPUT	1.5 mV/V nom.
CAPACITY	5 lb. [22.2N]
SAFE OVERLOAD	500 % of R.O.
ZERO BALANCE	±5% of R.O.
EXCITATION (VDC OR VAC)	15 MAX
BRIDGE RESISTANCE	117/350 Ω nom.
NONLINEARITY	±0.25% of R.O.
HYSTERESIS	±0.25% of R.O.
NONREPEATABILITY	±0.1% of R.O.
TEMP. SHIFT ZERO	±0.01% of R.O./°F (±0.018 of R.O./°C)
COMPENSATED TEMP.	60 to 160 °F (16 to 71 °C)
OPERATING TEMP	0 to 180 °F (-18 to 82 °C)
MATERIAL	CLEAR ANODIZED ALUMINUM
CONNECTOR-	8 POSITION JST SM08B-SRSS-TB(LF)(SN)

CUSTOMER APPROVAL- COMPANY:

CUSTOMER APPROVAL- NAME / DATE:

REVISIONS: (Refer to dwg # revision sheet)

OUTLINE DRAWING

STANDARD NOTES: (Unless Otherwise Specified)

ALL DIMENSIONS ARE IN INCHES
DRAWING INTERPRETATION DIMS. PER ASME-Y14.5
REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
THREADS PER HANDBOOK H-28
DIMENSIONS ARE SHOWN AFTER PLATING

3rd ANGLE PROJ.



ANGLE:
± 1/2°

CHAMFER:
± 5°

TOLERANCE:
.X ± 0.1"
.XX ± 0.01"
.XXX ± 0.005"

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK

ADVANCED SENSOR TECHNOLOGY, INC.
10 THOMAS, IRVINE, CA 92618 USA
Phone: (949) 465-0900
Fax: (949) 465-0905

MODEL: **QMA147**

DWG No.: **FO1501**

DRAWN BY: R. Walker

CREATED DATE: 7/16/2019

APPROVED BY: S. Michel

APPROVED DATE: 7/17/2019

CHECKED BY:

CAGE: 1X8M6 SHEET: 1 OF 1