

SBK C6 Series IP68 Stainless Steel Shear Beam Load Cells from 500kg to 2000kg



Standard Features

- C6 precision class
- Stainless steel construction
- IP68 protection
- Max. capacities from 500 to 2000 kg
- Shielded connection cable
- OIML certificate available upon request
- Test certificate available upon request

CAPACITIES (kg): 500, 1000, 2000.

OIML R60. C6 precision class.

Stainless steel. **IP68** protection.

Output Resistance **350 Ohm**.

Stainless steel shear beam load cells suitable for building, for example, CE-M approved scales with 4 load cells or for weighing tanks and hoppers with the relevant accessories.

Specifications

Minimum load cell verification interval:

$V_{min} = E_{Max} / 15.000$

Maximum number of verification intervals:

$n_{LC} = 6000$

Combined error:

0,008% of Full Scale Output (F.S.)

Full Scale Output:

2 mV/V \pm 0,1 %

Temperature effect on zero:

0,0009% /°C

Temperature effect on full scale output:

0,0007% /°C

Compensated Temperature Range:

-10°C/+40°C

Operating Temperature Range:

-20°C/+60°C

Creep error after 30 minutes:

0,012% F.S.

Maximum tolerated excitation voltage:

15 VDC

Input Resistance:

385 \pm 20 Ohm

Output Resistance:

350 \pm 5 Ohm

Insulation Resistance:

>5000 MOhm

Safe Overload:

150% F.S.

Ultimate Overload:

200% F.S.

Shielded cable:

6-wire shielded cable, 5m long, 5mm diameter.

Main Certifications

OIML R60

Australian legal for trade certificate

Wiring Code

Wiring Code	
<u>Colour</u>	<u>Function</u>
--	SHIELD
YELLOW	OUTPUT +
GREY	SENSE +
BROWN	INPUT +
WHITE	OUTPUT -
GREEN	INPUT -
PINK	SENSE -

ATEX Version

The CCATEX certificate makes the load cell suitable for use in hazardous areas with protection methods according to:


ATEX II 1G Ex ia IIC T6 (Ta -20 \pm +40°C) TX (Ta -20 \pm +65°C) Ga

ATEX II 1D Ex ta IIIC TX°C (Ta -20 \pm +40°C) TX°C (Ta -20 \pm +65°C) Da IP65

The certificate includes the manual and the ATEX CE conformity declaration (available in EN, DE, FR, and IT).

IMPORTANT: the certificate refers to the single load cell. For systems with more load cells, it is necessary to order one certificate for each load cell.

Dimensions

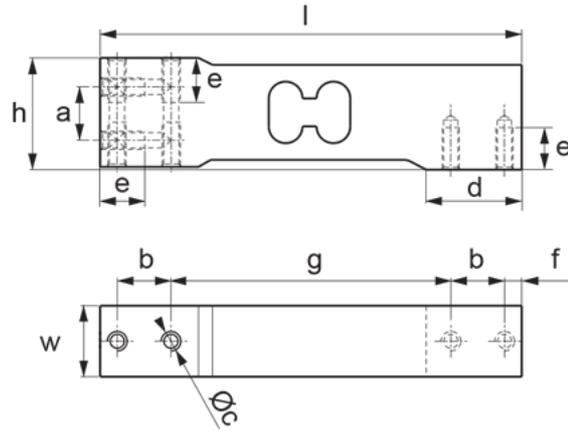

Code	Max (kg)	l (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c \varnothing (mm)	d \varnothing (mm)	e (mm)	f (mm)	g (mm)
<u>SBK500C6</u>	500	132	31,5	31	25,4	76,3	N°1 x M12	N°2 x M13	52,5	18	18
<u>SBK1000C6</u>	1.000	132	31,5	31	25,4	76,3	N°1 x M12	N°2 x M13	52,5	18	18
<u>SBK2000C6</u>	2.000	132	31,5	31	25,4	76,3	N°1 x M12	N°2 x M13	52,5	18	18

Parts

Part

Description

Available Versions

SBK500C6	Shear beam approved load cell C6, Max=500kg.
SBK1000C6	Shear beam approved load cell C6, Max=1000kg.
SBK2000C6	Shear beam approved load cell C6, Max=2000kg.

Options

Part #	Description
Joints	
AVM12	Stainless steel/rubber M12 elastic joint for SBX/SBK/SBT cells up to 2500kg.
SBJ12	M12 ball joint for load cells
Base Plates	
BPSB3	3 mm stainless steel base plate for SBT SBX SBK load cells up to 2500 kg. Size: 55 x 30 x 3 mm
BPSB5	5 mm stainless steel base plate for SBT SBX SBK load cells up to 2500 kg. Size: 55 x 30 x 5 mm
Mounting kits	
KSBN2	Galvanized steel kit for assembling 1 SBT/SBK/SBX cell from 300 to 2500kg.
KSBC2	Alloy steel kit for assembling 1 SBT/SBK/SBX cell from 300 to 2500kg.
KSBX2	Stainless steel kit for assembling 1 SBT/SBK/SBX cell from 300 to 2500kg.
KS2H	Stainless steel articulated plate with M12x50mm threading. Applicable to SB.. load cells with capacity up to 2000 kg. To combine with BLKM12I bush.
Support feet for 4-cell platforms	
SBFI-1	Stainless steel articulated foot with 50 mm non-slip rubber support base. Threading M12 x 1.75 x 43. For SBxx cells up to 2500kg . To combine with BLKM12I bush.
KS2FI-1	Stainless steel articulated foot with 60 mm non-slip rubber support base. Threading M12 x 1.75 x 46.
SBFA	Nickel-plated steel articulated foot with 60 mm non-slip rubber support base. Threading M12 x 1.75 x 45.
BLKM12I	Stainless steel M12 bush.
Stay Rod	
LNK2635	Galvanized stay rod with ball-and-socket joints. Max 100 kN. For proper installation, 2xLNKST are needed. Note: They can't be ATEX-certified.
LNKST	Single plate for stay rod. Fitted with fixing screw. (For proper installation, LNK2635 and a second LNKST are needed). Note: They can't be ATEX-certified.
Connection Cables	
LCCB	Shielded cable 6x0.25 mm ² (suitable for Ex zones). PVC inner sheath. Tinned copper braid shielding. PVC outer sheath, diameter 5.8 mm. Temperature range: -40 / +80 °C. Minimum length: 100 m. Maximum orderable length: 100 m (longer lengths available only upon request).
LCCBA	Armoured cable 6x0.25 mm ² (suitable for Ex zones). PVC inner sheath, diameter 5mm. Iron-zinc alloy armour. Transparent PVC outer sheath, 8 mm diameter. Temperature range: -15 / +80 °C. €/m. Maximum orderable length: 100 m (longer lengths available only upon request).
LCCBM	Shielded 4x0,34 mm ² cable for moving applications. €/m. Maximum orderable length: 100 m (longer lengths available only upon request).
PRCB	Protection sheathing for shielded cable. €/meter internal Ø 15mm. Maximum orderable length: 100 m (longer lengths available only upon request).
Junction Boxes	
JB4Q	Equalisation box for connection with up to 4 load cells. ABS box, IP67 protection rating, with 4 + 1 fairleads.
JB4QI	Stainless steel equalisation box for connection with up to 4 load cells. IP65 protection rating, with 4 + 1 fairleads.
JC4Q	Equalisation board for up to 4 cells. With UL marked PCB, Terminal block, plastic box and labels (if expected).
Available Weight Indicator / Transmitter	
DGT1S	Weight transmitter on DIN bar, with 2 INPUTS and 2 OUTPUTS. Fitted with 5-key keypad and LED display. Multifunction weighing program.
DGT1	Weight transmitter for DIN bar. 5-key keypad, LED display, date/time, alibi memory, and multifunction weighing program.
DGT4	Transmitter for DIN bar with 4 channels, 2 IN and 2 OUT. 5-key keypad, LED display, and standard weighing program.
DGTQ	Transmitter for panel mounting, with 2 IN and 2 OUT. 5-key keypad, LED display, and standard weighing program.
Options for ATEX Version	
ZBA1S	Intrinsic protection three channel Zener barrier. Specific for connection to load cells, for mounting on DIN rail in a safe area, or in a flame-proof case. Marking: ATEX/IECEx II (I) GD [Ex ic] with safety instructions and the ATEX EU declaration of conformity (EN, DE, FR, ES and IT).
KZBA-1	ATEX ABS housing kit with Zener Barrier ZBA1S for load cells. For intrinsically safe weighing systems in a dangerous zone. Dimensions 179x359x166,5mm. Marking of housing + Zener Barrier [ia Ga] IIC T4 Gc X for gas, ATEX II 3(1)D Ex tc [ia Da] IIIC T135°C Dc IP66 X for dust. Provided with safety instructions and the ATEX EU declaration of conformity (EN and IT).
JB4QAI	ATEX equalisation box made of stainless steel IP66 for up to 4 cells. 4 + 1 fairleads. Marking: ATEX II 2G Ex ib IIC T6 Gb for gases, ATEX II 2D Ex tb IIIC T115°C Db IP65 for dusts. Provided with safety instructions and the ATEX EU declaration of conformity (EN, DE, FR, ES and IT).

Part #	Description
JB4QA	ATEX equalisation box made of ABS IP67, for up to 4 cells. 4 + 1 fairleads. Marking: ATEX II 2G Ex ib IIC T6 Gb for gases, ATEX II 2D Ex tb IIIC T115°C Db IP65 for dust. Provided with safety declaration of conformity (EN, DE, FR, ES and IT).
LCCB	Shielded cable 6x0.25 mm ² (suitable for Ex zones). PVC inner sheath. Tinned copper braid shielding. PVC outer sheath, diameter 5.8 mm. Temperature range: -40 / +80 °C. Minimum length: 100 m. Maximum orderable length: 100 m (longer lengths available only upon request).
EXCB6	Blue shielded cable 6x0.22 mm ² , only for EX i (2GD) assemblies. PVC inner sheath. Tinned copper braid shielding. Polyurethane outer sheath, diameter 5.8 mm. Temperature range: -40 / +80 °C. Minimum length: 100 m. Maximum orderable length: 100 m (longer lengths available only upon request).
KMB4-1	Kit of 3 ATEX Zener barriers for load cells, in an ABS box. For up to 4 load cells of 350 ohm, for intrinsic protection weighing systems in a dangerous area. Marking of the whole box with 3(1)G Ex nA [ia Ga] IIC T4 Gc (-20°C = Ta = +40°C) for gas, ATEX II 3(1)D Ex tb [ia Da] IIIC T130°C Dc IP65 (-20°C = Ta = +40°C) for dusts. Provided with safety instructions and the ATEX EU declaration of conformity (EN, DE, FR, ES and IT).
CCATEX-1	Optional ATEX version for single load cell. Marking: ATEX II 1G Ex ia IIC T6 (Ta -20/+40°C) TX (Ta -20/+65°C) Ga and ATEX II 1D Ex ta IIIC TX°C (Ta -20/+40°C) TX°C (Ta -20/+65°C) Da IP65 for dusts. Provided with safety instructions and the ATEX EU declaration of conformity (EN, DE, FR, ES and IT).
CCATEX3GD	ATEX certificate for each load cell. Marking: ATEX II 3G Ex nA IIC T6 Gc for gas and ATEX II 3D Ex tc IIIC T115°C Dc IP65 for dusts. Complete with manual and ATEX CE conformity declaration (EN, DE, FR, ES and IT).
DCATEXMECH	ATEX version for the PLATFORM / LOAD CELL MOUNTING KIT for zone 1/21 (for the load cells ATEX declaration see CCATEX code). Option to be offered only if the platform is ordered with the platform. Refer to the available certifications for the chosen weight indicator. Provided with safety instructions and ATEX EU declaration of conformity (EN, DE, FR, ES and IT). Includes IP68 connection cable for weight indicator.
DCATEXMB4	ATEX declaration for the whole system with Dini Argeo Zener barriers. Ex II 2G IIC T6 Gb X e Ex II 2D IIIC T125°C Db X system, with label of the whole system, for weight indicator connection cable connected to a mechanical structure with ATEX load cells (each cell must be certified with CCATEX option). Provided with descriptive document of the assembly and ATEX EU declaration of conformity (EN and IT).

Dini Argeo S.r.l. | Via della Fisica, 20 - 41042, Spezzano di Fiorano, Modena (MO), Italy | Tel.: +39 0536 843418

www.diniargeo.com