




TT50609

Static Torque Transducers 10 -100 ozf.in M/F



PRODUCT DETAILS

- Accuracy: Class 1 for the primary classification range (+/-0.5% of reading)
- Static torque transducers calibrated between 10 - 100 ozf.in
- Robust, heat treated, alloy steel torsion shaft design
- Designed to ignore non torsional forces
- Smart transducers have a built in memory circuit which contains essential information about the transducer. The information can be accessed with the TST, TTT, TTL-HE and T-Box 2 instruments.
- Operates in both clockwise and anti-clockwise directions
- Calibrated in clockwise as standard. Anti-clockwise provided upon request
- 'SMART' transducers can also be used with many instruments not of Norbar manufacture. However, the 'SMART' data will not read, these will operate as normal ratio calibrated transducers (mv/V)
- Supplied with a UKAS accredited calibration certificate
- Made in the UK

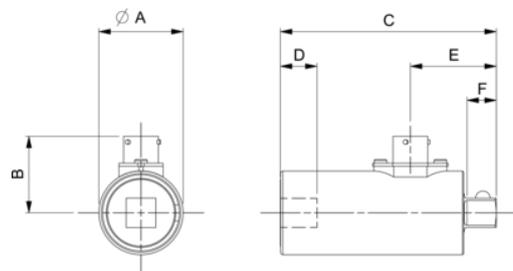

PRODUCT ATTRIBUTES

Product	 ozf.in	A	B	C	D	E	F		
50609.IND	10 -100 ozf.in	36 mm	33 mm	86 mm	10 mm	30 mm	6.5 mm	1/4 in M/F	0.45 kg
50609.LOG	10 -100 ozf.in	36 mm	33 mm	86 mm	10 mm	30 mm	6.5 mm	1/4 in M/F	0.45 kg