


PRESS FORCE LOAD CELL


Press Force Load Cells are strain gauge based transducers for press-force monitoring.

This type offers capacities up to 100 kN and 20 kbf with compensated temperature performances. Cable is contained within a stainless steel spring for strain relief purposes for additional protection.

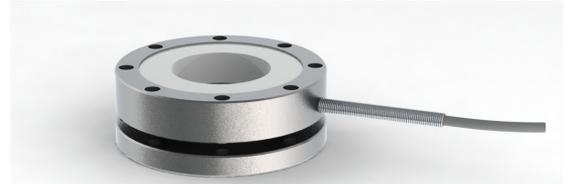

WIRING

- Sensor is provided with 3m, 6x30 AWG cable (Other lengths are available on request). Voltage, current loop or digital output versions are also available on request.

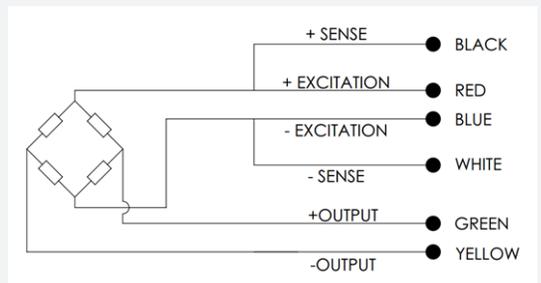


CAPACITY	DEFLECTION (NOM.) (MM) [IN]
2kN	0.02 [.001]
5kN	0.03 [.001]
10kN	0.03 [.001]
20kN	0.05 [.002]
50kN	0.10 [.004]
100kN	0.15 [.006]

To find out more visit hitecsensors.com

PRESS FORCE LOAD CELL

DIMENSIONS

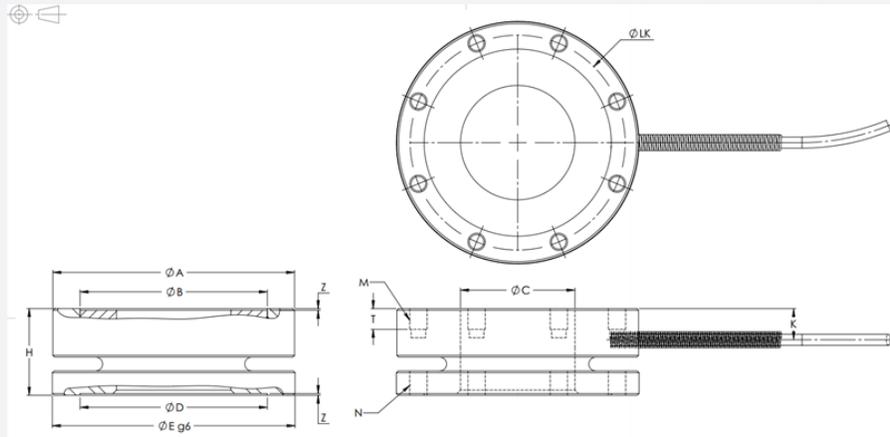

Metric version (mm)

NOMINAL FORCE (KN)	A	B	C	D	E	H	K	Z	M	T	LK	N
2 / 5 / 10 / 20	69.7	54	33	54	70	25	9	0.5	M5-0.8, 8x45°	6	62	M5-0.8, 8x45°
50 / 100	111.5	97	70	97	112	35	13	1.1	M6-1, 8x45°	10	104	M6-1, 8x45°

Pound version (inch)

NOMINAL FORCE (KLBF)	A	B	C	D	E	H	K	Z	M	T	LK	N
0.5 / 1 / 2 / 5	2.74	2.13	1.30	2.13	2.756	0.98	0.35	0.02	#10-24, 8x45°	0.24	2.44	#10-24, 8x45°
10 / 20	4.39	3.82	2.76	3.82	4.409	1.38	0.51	0.04	#12-24, 8x45°	0.39	4.09	#12-24, 8x45°

To find out more visit hitecsensors.com

 **HITECSENSORS**
A HUMANETICS COMPANY

Copyright © HITEC Sensors 2020. This flyer is indicative only. Contact HITEC directly for details.

PRESS FORCE LOAD CELL

SPECIFICATION

PARAMETER	RANGE	NOTES
Capacity (kN) Capacity (klbf)	2,5,10, 20, 50 and 100 0.5, 1, 2, 5, 10 and 20	
Safe Overload (%)	200 FS	No influence on measurement
Ultimate Load (%)	>300 FS	
Sensitivity (mV/V)	1 ± 20%	Voltage, current loop or digital output
Non-Linearity (%)	±0.25 FS	±0.5% FS max.
Hysteresis (%)	±0.25 FS	±0.5% FS max.
Repeatability (%)	±0.1 FS max.	
No Load Offset (%)	±2 RO	
Zero Temperature Coefficient (%)	0.02 RO/°C	
Sensitivity Temperature Coefficient (%)	0.02 RO/°C	
Compensated Temperature (°C)	-15 to +70	
Operating Temperature (°C)	-40 to +70	
Bridge Resistance (ohm)	700	
Excitation (V)	5, 10	
IP Rating	60	
Material	Stainless steel	

HITEC Sensor Developments, Inc. | 10 Elizabeth Drive
Chelmsford, MA 01824 | United States of America
T +1 978 742 9032 | F +1 978 742 9033

hitecsensors.com