

Terms and Conditions of Use

This drawing, including all information depicted herein (collectively, "Drawing"), is FUTEK's property and protected under applicable law, including copyright. FUTEK reserves all rights. The Drawing is provided solely for your information and exclusive use. **Except as expressly approved by FUTEK in writing, you may not reproduce or share this Drawing**, in whole or part, with any other firm or individual, or attempt to reverse engineer the Drawing or data contained therein. Any reproduction of this Drawing in whole or part must include this legend.

By accessing the Drawing, you agree that you have read, understand, and agree to abide by the stated Terms and Conditions of Use.

© 2023 FUTEK Advanced Sensor Technology, Inc.



FUTEK MODEL QLA388 SMART COMPRESSION LOAD PROBE CARTRIDGE

71MM & 75MM CABLE EXIT VERSION

ITEM NUMBER: SEE CHART

- Operates Under Pressure Ranges up to 6 Bar
- Supports improvement of Sealed chamber
- Ease of installation and replacement from bottom side

INCH [mm]		R.O. = Rated Output	
WIRING CODE			
+ Excitation	- Excitation	+ Signal	- Signal
RED	BLACK	GREEN	WHITE
TEDS DATA	TEDS GND	Shield	
BLUE	YELLOW	FLOATING	

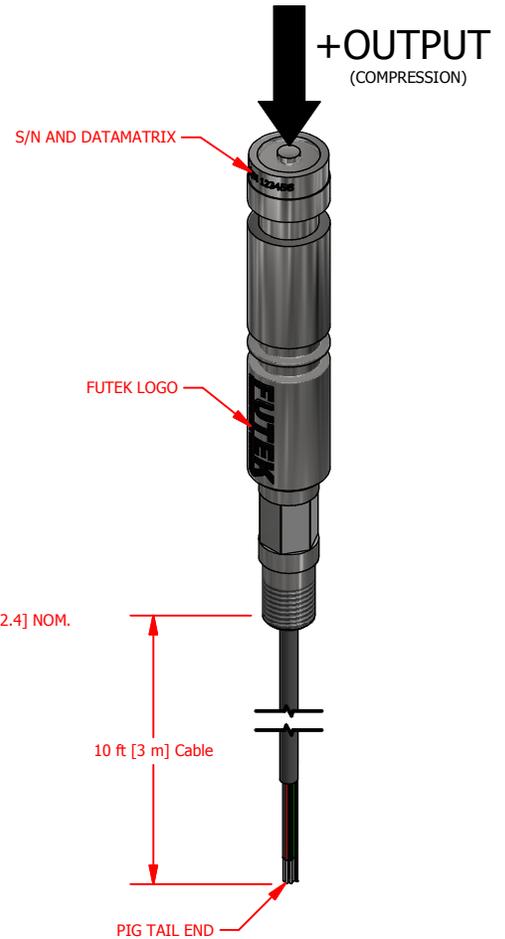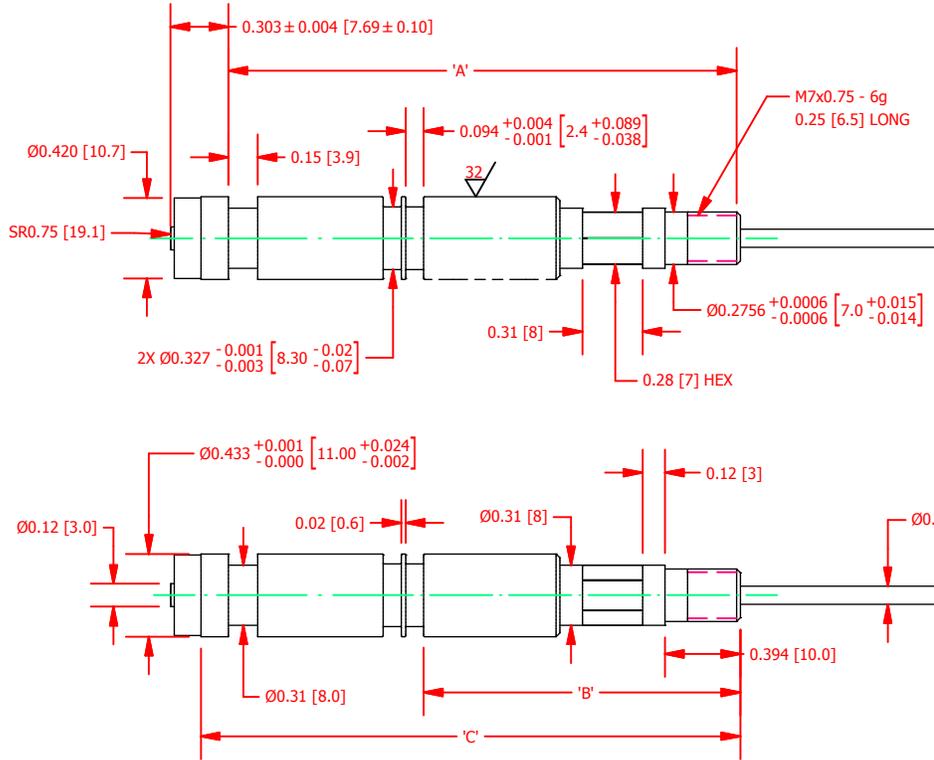

Preliminary Drawing

ITEM #	'A'	'B'	'C'
QSH01816	2.68 [68.1]	1.66 [42.1]	2.82 [71.7]
QSH01817	2.82 [71.7]	1.76 [44.7]	2.97 [75.3]

SPECIFICATIONS:

CAPACITY	100kg
SAFE OVERLOAD	150 % of R.O.
EXCITATION (VDC OR VAC)	7 MAX
OPERATING TEMP	-40 to 185 °F (-40 to 85 °C)
WEIGHT (approx)	0.12 lb [54.4 g]
MATERIAL (sensor body)	17-4 PH S.S.
CABLE: #30 AWG 6 Conductor Braided Shielded Cable, 10 ft [3 m] Long	
CALIBRATION TEST EXCITATION	5 VDC
CALIBRATION	5 pt. COMPRESSION

CUSTOMER APPROVAL- COMPANY:

OUTLINE DRAWING

FUTEK

This drawing, including all information depicted herein (collectively, "Drawing"), is FUTEK's property and protected under applicable law, including copyright. FUTEK reserves all rights. The Drawing is provided solely for your information and exclusive use. Except as expressly approved by FUTEK in writing, you may not reproduce or share this Drawing in whole or part, with any other firm or individual, or attempt to reverse engineer the Drawing or data contained therein. Any reproduction of this Drawing in whole or part must include this legend.

CUSTOMER APPROVAL- NAME / DATE:

STANDARD NOTES: (Unless Otherwise Specified)

REVISIONS: (Refer to dwg # revision sheet)

ALL DIMENSIONS ARE IN INCHES
DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
THREADS PER HANDBOOK H-28
DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:
± 1/2°

CHAMFER:
± 5°

3rd ANGLE PROJ.
TOLERANCE:
.X ± 0.1"
.XX ± 0.01"
.XXX ± 0.005"



MODEL: **QLA388**

DWG No.: **FO1403**

DRAWN BY: M. Lisiak

CREATED DATE: 7/31/2015

APPROVED BY: _____

APPROVED DATE:

CHECKED BY:

CAGE: 1X8M6 SHEET: 1 OF 1