


# ALUMINIUM SINGLE POINT LOAD CELL

capacities 3kg - 100kg

NEW

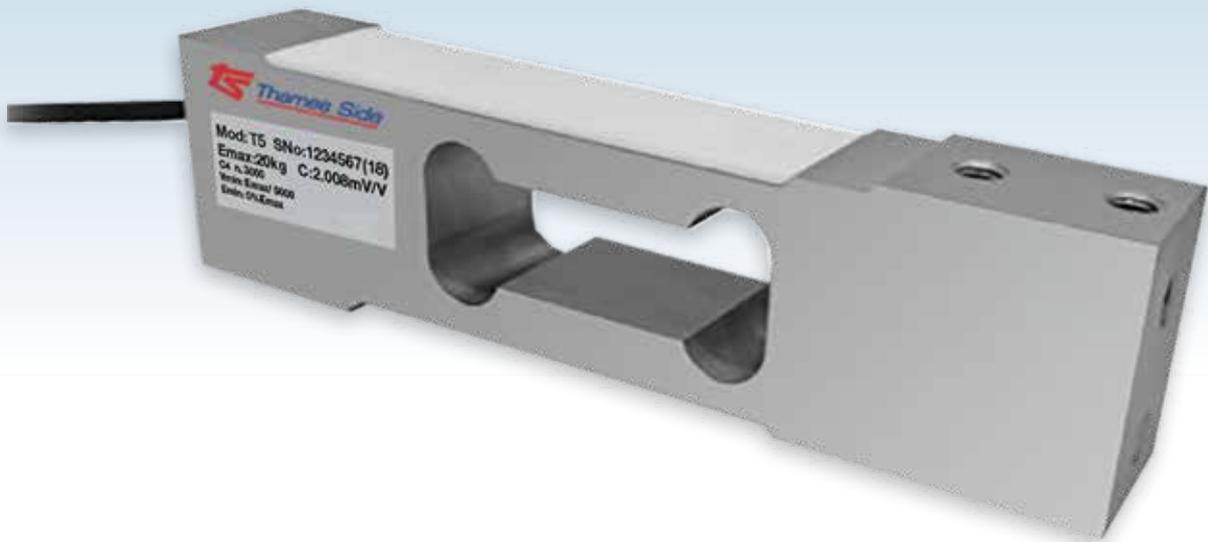



This double bending beam single point load cell is manufactured from high quality aluminium alloy. Its design allows for high accuracy weight measurement with off-centre loads. It's potted and sealed to IP66.

Typical applications include: single point platforms up to 400x400mm in size, small buckets and hoppers supported by a single load cell, small bagging & dosing machines as well as filling scales.

- Double bending beam load cell
- High quality aluminium alloy load sensor
- High accuracy with off-centre loads
- Potted and silicone sealed to IP66
- Wide operating temperature range
- 3000 divisions
- Combined error +/- 0.017%
- 1 year warranty
- 400 x 400mm maximum platform size (load cell placed centrally under the platform)

# T5


technical specification...

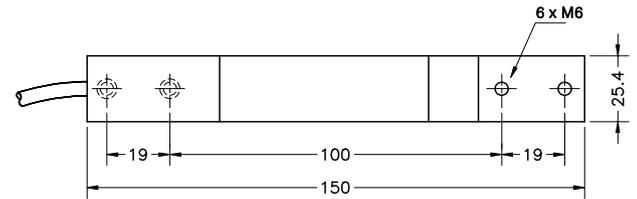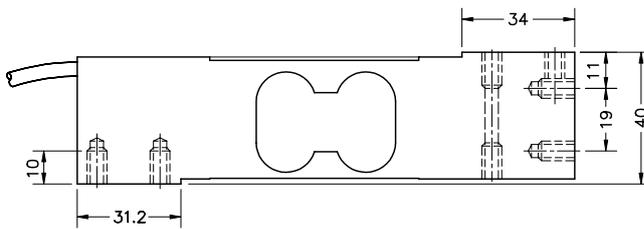

All dimensions in mm

## T5 Load Cell

	Load cell specification	Units
Load Cell Capacity ( $E_{max}$ )	3, 5, 8, 10, 15, 20, 30, 50, 75, 100	kg
Rated Output ( $S_n$ )	2	mV/V $\pm$ 10 %
Accuracy class	3000	-
Combined Error	$< \pm 0.017$	% $S_n$
Non-repeatability	$< \pm 0.01$	% $S_n$
Minimum load cell interval ( $V_{min}$ ) = $E_{max} / Y$	$E_{max} / 10000$	kg
Creep (30 minutes)	$< \pm 0.016$	% $S_n$
Temperature Effect on Zero Balance	$< \pm 0.01$	% $S_n / 5^\circ C$
Temperature Effect on Span	$< \pm 0.006$	% $S_n / 5^\circ C$
Compensated Temperature Range	-10 to +40	$^\circ C$
Operating Temperature Range	-20 to +70	$^\circ C$
Safe Overload	150	% $E_{max}^*$
Ultimate Overload	200	% $E_{max}^*$
Zero Balance	$< \pm 2$	% $S_n$
Input Resistance	400	$\Omega \pm 20$
Output Resistance	350	$\Omega \pm 3$
Insulation Resistance	$> 5000$	M $\Omega$ @ 100V
Recommended Supply Voltage	5-15	V
Maximum Supply Voltage	15	V
Environmental Protection	IP66	-
Maximum deflection at $E_{max}$	0.3 - 0.5	mm
Cable Length	3	m
Cable Material	PVC	-
Nominal Shipping Weight	0.45	kg

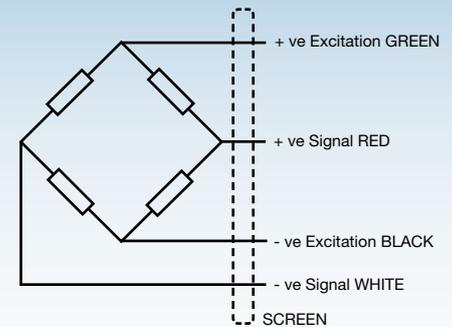

### Electrical Connections

Via 4 core, 4mm diameter, screened PVC cable.  
Screen not connected electrically to load cell.

### Construction

Load cell manufactured from high quality aluminium alloy

\* Load limit applies to central loads only. Load limit for off-centre loads will be lower.

## Thames Side Sensors India Pvt. Ltd.

A subsidiary of Thames Side Sensors Ltd. (UK)

C-6 & C-7, Hind Saurashtra Industrial Estate, Near Mittal Industrial Estate,  
Marol Naka, Andheri-Kurla Road, Andheri-East, Mumbai-400 059

T: +91 22 2850 6711

E: sales@thames-side.in

www.thames-side.in

CIN U31908MH2011FTC219481



Issue: IN/T5.06.19

Our policy is one of continuous product enhancement. We therefore reserve the right to incorporate technical modifications without prior notification.