


Specifications

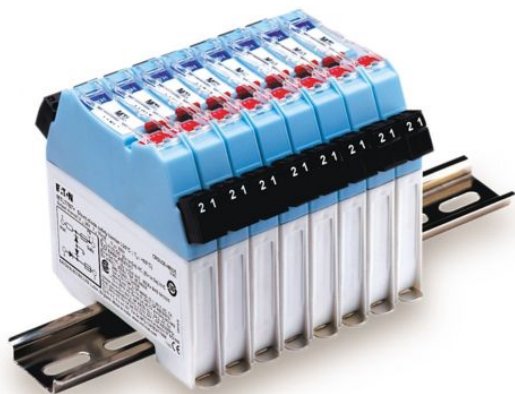

Eaton MTL7728P+

Eaton Crouse-Hinds series MTL7700 Zener barrier, Analogue/digital, 28 Vdc, 119mA, Polycarbonate, DIN rail mount, + polarity, For controller outputs, solenoid valves

General specifications

| | |
|-----------------------------|---|
| PRODUCT NAME | Eaton Crouse-Hinds series MTL7700 Zener barrier |
| PRODUCT NAME | Eaton Crouse-Hinds series MTL7700 Zener barrier |
| CATALOG NUMBER | MTL7728P+ |
| EAN | 3066227675739 |
| PRODUCT LENGTH/DEPTH | 105 mm |
| PRODUCT HEIGHT | 90 mm |
| PRODUCT WIDTH | 12.6 mm |
| PRODUCT WEIGHT | 140 g |
| PRODUCT TYPE | Zener barrier |



Powering Business Worldwide

Certifications and compliances

| | |
|--|--|
| AREA CLASSIFICATION | Hazardous/Classified Locations |
| STANDARDS TYPE | IECEX/ATEX IEC NEC/CEC |
| NEC HAZARDOUS RATING | Class I, Division 2 Class I, Zone 2 |
| IECEX/ATEX HAZARDOUS RATING | Zone 2 Zone 0 |
| INGRESS PROTECTION (IP) RATINGS | IP20 |

Resources

| | |
|------------------------------------|--|
| INSTALLATION INSTRUCTIONS | MTL7700 ATEX Safety Instructions |
| TECHNICAL SERVICE BULLETINS | MTL7700 Range datasheet |

Product specifications

| | |
|--------------------------------------|------------------|
| TYPICAL APPLICATION | Analogue/digital |
| RATED SUPPLY VOLTAGE DC | 28 Vdc |
| TYPE OF POWER SUPPLY | DC |
| SWITCHING CURRENT | 119mA |
| MATERIAL | Polycarbonate |
| MOUNTING METHOD | DIN rail |
| MINIMUM OPERATING TEMPERATURE | -20 °C |
| MAXIMUM OPERATING TEMPERATURE | 60 °C |

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

