


Weight indicator / repeater

model **GRM-XL**

Weight indicator with large matrix LED-display composed of very intense bright LEDs. Particularly suitable for outdoor applications.

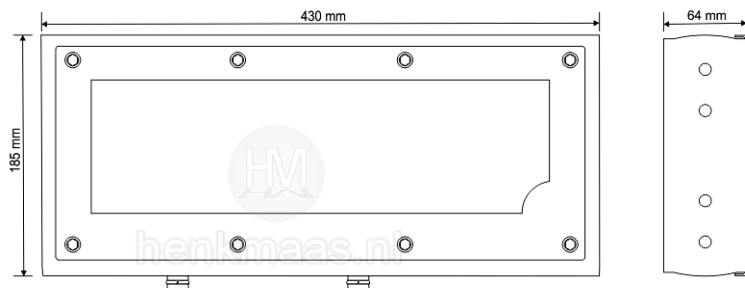

Properties

- CE-verified
- large 6-digit display, 100 mm high, with SMD LEDs, visible from over 25 m
- software adjustment of the brightness intensity
- stainless steel housing IP68, dim. 430 x 185 x 64 mm, supplied with stainless steel mounting bracket
- max. 10.000e or multirange 2 x 3000e @ 0,3 μ V/d in CE-M approved version for legal for trade use
- internal power supply 240V / 12-24Vdc
- flat keypad with 5 function keys
- configurable as weight indicator or 2nd indicator (repeater)
- preset tare; formula weighing, piece counting, hold / peak, gross/nett, print
- RS-232 bidirectional interface
- RS-485 bidirectional interface
- 2 photomofet 150 mA 48Vac / 150 mA 60 Vdc (NO) outputs
- 2 optoisolated photocouplers 12-24Vdc, 5mA min., 20 mA max.
- high resolution reading (10x more accurate)
- cumulative weighing; formula weighing; verifiable transmission weighing data to PC/PLC (with optional alibi memory); piececounting; in-out-vehicle weighing; hold-/peak value function

Options i.a.

- stainless steel visor cap
- external thermal ticket printer
- weigh software for Windows
- real time clock module
- alibi memory incl. date/time for max. 120.000 weighings
- 16-bit analogue output
- cable from RS-232 to PC/printer
- wireless connection to PC-printer
- ethernet interface



CE-verifiable, class III (application for legal trade)

