

# Weighing indicator

# model ISCI




## General data

- **CE verified**
- water protected, flat keyboard, model **ISCI** with 17 keys
- clearly readable, backlit LCD display, 25 mm height
- ABS plastic housing, protection class IP65, dim. 278 x 192 x 186 mm (w x h x d)
- incl. adjustable wall mounting bracket / table stand
- 24-bit A/D-converter, 4-channel
- display resolution up to 10000e or multirange 3 x 3000e (CE approved)
- internal rechargeable battery (60 h operation time with one 350  $\Omega$  load cell)
- number of connectable load cells: 8 (350  $\Omega$ ) / 16 (700  $\Omega$ )
- nett/gross indication in kg or lb; cumulative weighing, recipe weighing, percentage determination, piece counting, in-/out trucks, hold function, peek value
- network function up to 4 indicators
- 2x RS-232/C port

## Options

- stand for installation on the floor
- real time clock
- IR remote control with IR-input kit
- thermal receipt printer or label printer
- connection cable RS-232 to PC/printer
- wireless connection to PC-printer
- module with 2 optoisolated digital inputs / 2 photomofet outputs, applicable as settable set points / 1,5 mtr. connection cable (not together with alibi memory)
- alibi memory with date/time, max. 120.000 weighings
- radio interface for wireless connection to PC/printer and indicator
- ethernet interface + ethernet cable (1,5 m)

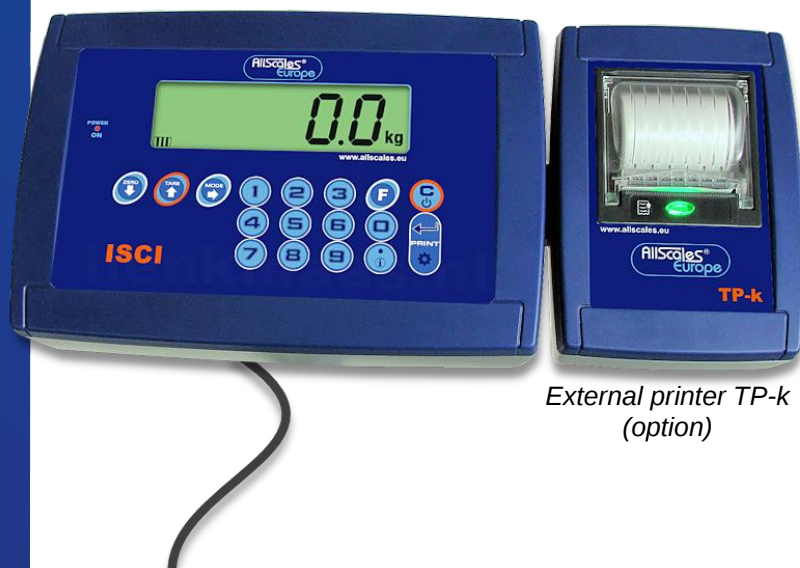

External printer TP-k  
(option)

