



Standard Features

As a direct replacement for the threaded-style Avery Weigh-Tronix® Weigh Bar®, this load cell has an improved stainless steel construction and a potted IP67 housing. It's available in 1,250- or 2,500-pound capacities and comes with 20 feet of cable.

Approvals






WARNING: Cancer and Reproductive Harm
California Proposition 65

RL32011WB-T Load Cell Specifications

Full Scale Output: 2.0 (±0.1%) mV/V Output Resistance: 350 (±3) ohm Input Resistance: 385 (±10) ohm Material/Finish: Stainless steel Temperature: Compensated: 14 to 104 °F (-10 to 40 °C) Operating: 0 to 150 °F (-18 to 65 °C) Seal Type: Environmentally sealed, IP67	Safe Overload: 150% full scale Safe Sideload: 100% full scale Rated Excitation: 5 to 10 VDC Combined Error: 0.02% full scale Non-repeatability: ± 0.01% full scale Insulation Resistance: 5,000 megohm	Cable Length: 20 ft Cable Diameter: 0.190 in Polyurethane jacket Cable Color Code: Green +Excitation Black -Excitation White +Signal Red -Signal Warranty: Two-year limited Approvals: NTEP 11-024
--	--	--

RL32011WB-T Load Cell Dimensions

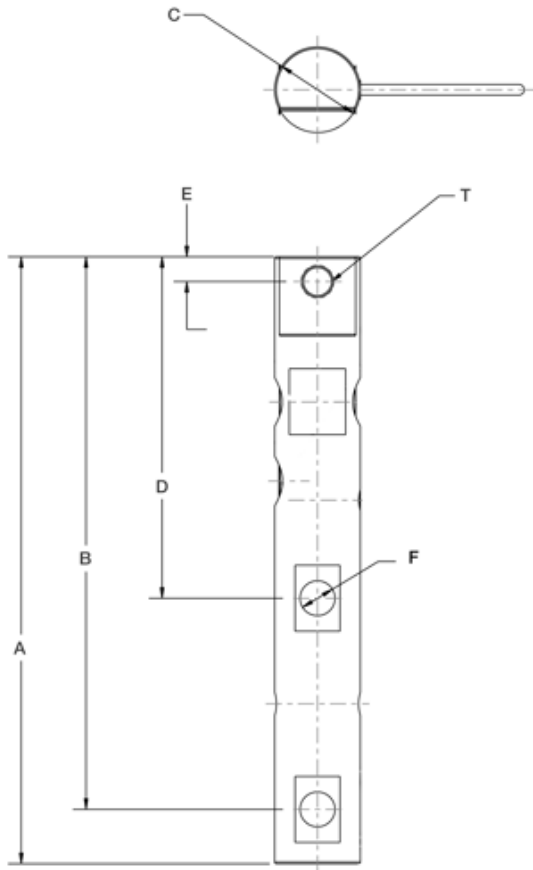

RATED CAPACITY	A	B	C	D	E	F	T
LB/IN							
1,250	11.50	10.47	1.25	6.47	0.47	0.53	1/2-13 UNC
2,500	11.50	10.47	1.62	6.47	0.47	0.66	5/8-11 UNC

PART #	DESCRIPTION	LIST PRICE
119796	1.25k 1250lb 20ft 2mv/v 350 Ohm SST EW NTEP III 5 M IP67 Threaded	List Price: \$525.00
119797	2.5k 2500lb 20ft 2mv/v 350 Ohm SST EW NTEP III 5 M IP67 Threaded	List Price: \$525.00

www.ricelake.com | 800-472-6703

An ISO 9001 Registered Company ©2026 Rice Lake Weighing Systems