



Standard Features

This stainless steel, double-ended beam is designed for tank and hopper applications. It has capacities from 5,000 to 25,000 pounds and comes with 25 feet of load cell cable.




WARNING: Cancer and Reproductive Harm California Proposition 65

RL75016SS-W Load Cell Specifications

Full Scale Output: 3.0 mV/V Output Resistance: 700 (±5) ohm Input Resistance: 770 (±10) ohm Material/Finish: Stainless steel Temperature: Operating: 0 to 150 °F (-18 to 65 °C)	Seal Type: Welded seal, IP67 Safe Overload: 100% full scale Rated Excitation: 5 to 10 VDC (15 V max) Hysteresis: 0.02% full scale Linearity: 0.03% full scale	Cable Length: 25 ft Cable Color Code: Red +Excitation Black -Excitation Green +Signal White -Signal Warranty: Two-year limited
---	---	--

RL75016SS-W Load Cell Dimensions

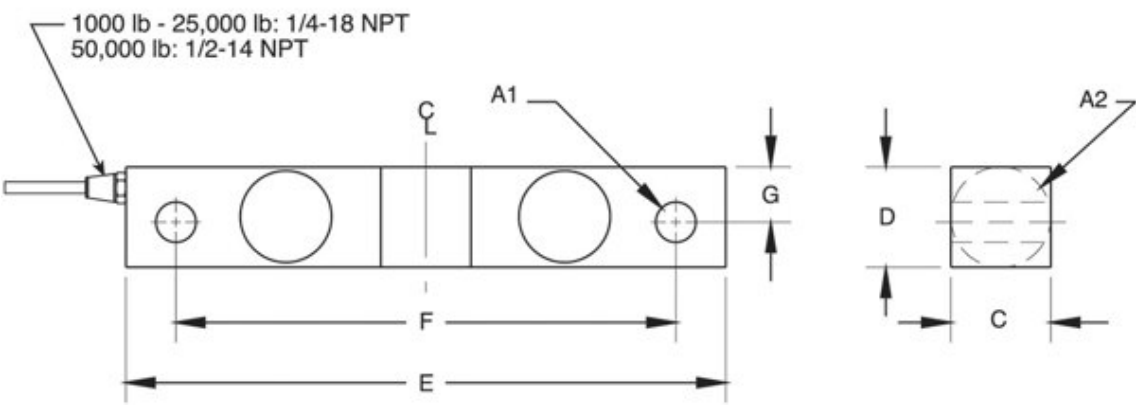

RATED CAPACITY	A1	A2	C	D	E	F	G
LB/IN							
5,000	0.50	1.25	1.25	1.25	7.50	6.25	0.69
10,000 to 25,000	0.81	1.99	1.44	1.94	8.75	7.50	0.96

PART #	DESCRIPTION	LIST PRICE
168115	5k 5000lb 25ft 3mv/v 700/770 ohm IP67 WW SST Welded	List Price: \$630.00
168116	10k 10000lb 25ft 3mv/v 700/770 ohm IP67 WW SST Welded	List Price: \$715.00
168117	15k 15000lb 25ft 3mv/v 700/770 ohm IP67 WW SST Welded	List Price: \$715.00
168118	20k 20000lb 25ft 3mv/v 700/770 ohm IP67 WW SST Welded	List Price: \$715.00
168119	25k 25000lb 25ft 3mv/v 700/770 ohm IP67 WW SST Welded	List Price: \$715.00

www.ricelake.com | 800-472-6703

An ISO 9001 Registered Company ©2026 Rice Lake Weighing Systems