

Rice Lake RLPC4SS-HE Stainless Steel, Single Point Load Cell



Standard Features

Ideal for bench scales in washdown applications, the RLPC4SS-HE stainless steel, hermetically sealed single point load cell. It's available from 10 to 100 kilogram capacities, is NTEP Certified, OIML approved and comes with 10 feet of cable.

Approvals




WARNING: Cancer and
Reproductive Harm
California Proposition
65

RLPC4SS-HE Load Cell Specifications

Full Scale Output: 2 mV/V Output Resistance: 960 (± 50) ohm Input Resistance: 1100 (± 50) ohm Material/Finish: Stainless steel Temperature: Compensated: 14 °F to 104 °F (-10 °C to 40 °C) Operating: 0 °F to 150 °F (-18 °C to 65 °C)	Seal Type: Hermetically sealed, IP69K Safe Overload: 150% full scale Rated Excitation: 5 to 10 VDC Combined Error: 0.02% full scale Insulation Resistance: > 5,000 megohm Cable Length: 10 ft	Cable Color Code: Green +Excitation Black -Excitation White +Signal Red -Signal Blue +Sense Brown -Sense Yellow Shield Max Platform Size: 500 × 400 mm Warranty: One-year limited Approvals: NTEP 21-016 OIML R60/2017-A-NL1-21.18
---	--	--

RLPC4SS-HE Load Cell Dimensions

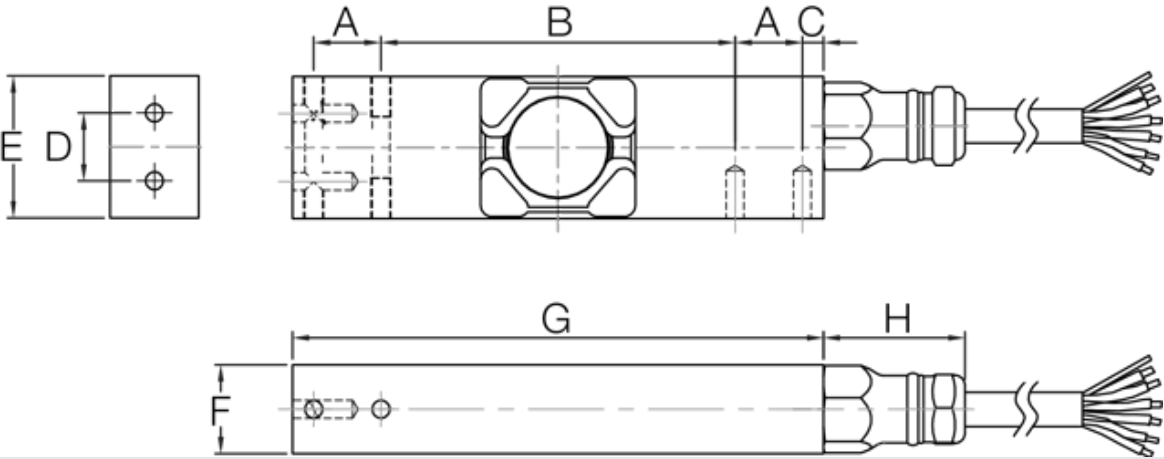

RATED CAPACITY	A	B	C	D	E	F	G	H
KG/MM								
10 to 100	19.0	100.0	6.0	19.1	40.0	25.0	150.0	40.0

PART #	DESCRIPTION	LIST PRICE
205271	20kg 10ft 2mv/v 350 Ohm SST HS IP69K NTEP III 5S	List Price: \$630.00
205272	50kg 10ft 2mv/v 350 Ohm SST HS IP69K NTEP III 5S	List Price: \$630.00
205273	100kg 10ft 2mv/v 350 Ohm SST HS IP69K NTEP III 5S	List Price: \$630.00