

Rice Lake RLPWM15 Stainless Steel, Single Point Load Cell



As of: Monday, August 3, 2026



Standard Features

This load cell is a replacement for the HBK® PW15 and is used for multiple types of bench scales. The RLPWM15 is environmentally sealed and has capacities of 10 to 100 kilograms, equipped with 3 meters of load cell cable. It's NTEP Certified and FM approved.

Approvals




WARNING: Cancer and
Reproductive Harm California
Proposition 65

RLPWM15 Load Cell Specifications

Full Scale Output: 2.0 mV/V Bridge Resistance: 350 ohm, nominal Material/Finish: Stainless steel Temperature: Compensated: 14 to 104 °F (-10 to 40 °C) Operating: 0 to 150 °F (-18 to 65 °C) Seal Type: Environmentally sealed, IP67	Safe Overload: 150% full scale Rated Excitation: 5 to 10 VDC (15 V maximum) Combined Error: 0.02% full scale Insulation Resistance: 1,000 megohm Cable Length: 10 ft Cable Diameter: 0.190 in PVC jacket	Cable Color Code: Blue +Excitation Black -Excitation White +Signal Red -Signal Green +Sense Gray -Sense Max Platform Size: 15 × 15 in Warranty: Two-year limited Approvals: NTEP 11-038 FM
--	--	--

RLPWM15 Load Cell Dimensions

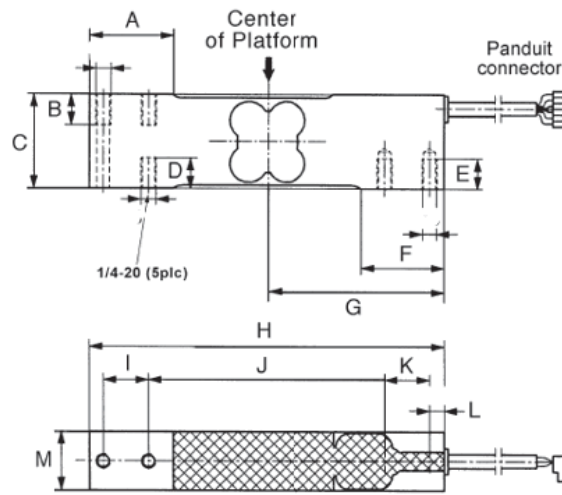

RATED CAPACITY	A	B	C	D	E	F	G	H	I	J	K	L	M	T
KG/MM														
10 to 100	35.0	13.0	40.0	13.0	13.0	35.0	75.0	150.0	19.0	100.0	19.0	6.2	25.0	1/4-20 UNC

PART #	DESCRIPTION	LIST PRICE
119904	10kg 2mv/v 350 Ohm 10ft SST NTEP 5000 III FM IP67	List Price: \$495.00
119912	15kg 2mv/v 350 Ohm 10ft SST NTEP 5000 III S FM	List Price: \$495.00
119905	20kg 2mv/v 350 Ohm 10ft SST NTEP 5000 III FM IP67	List Price: \$495.00
119908	50kg 2mv/v 350 Ohm 10ft SST NTEP 5000 III FM IP67	List Price: \$495.00
119909	75kg 2mv/v 350 Ohm 10ft SST NTEP 5000 III FM IP67	List Price: \$495.00
119910	100kg 2mv/v 350 Ohm 10ft SST NTEP 5000 III FM IP67	List Price: \$495.00

www.ricelake.com | 800-472-6703

An ISO 9001 Registered Company ©2026 Rice Lake Weighing Systems