



Standard Features

This is a Legal for Trade link-style replacement for the Avery Weigh-Tronix® Weigh Bar®. The RL32011WB-L has a stainless steel construction, an IP67 rating and can be used for floor scale, mount assemblies and truck scale designs. It has capacities of 1,250 to 10,000 pounds and comes with 20 feet of load cell cable.

Approvals






WARNING: Cancer and Reproductive Harm
California Proposition 65

RL32011WB-L Load Cell Specifications

Full Scale Output: 2.0 (±0.1%) mV/V Output Resistance: 350 (±3) ohm Input Resistance: 385 (±10) ohm Material/Finish: Stainless steel Temperature: Compensated: 14 to 104 °F (-10 to 40 °C) Operating: 0 to 150 °F (-18 to 65 °C) Seal Type: Environmentally sealed, IP67	Safe Overload: 150% full scale Safe Sideload: 100% full scale Rated Excitation: 5 to 10 VDC Combined Error: 0.02% full scale Non-repeatability: ± 0.01% full scale Insulation Resistance: 5,000 megohm	Cable Length: 20 ft Cable Diameter: 0.190 in Polyurethane jacket Cable Color Code: Green +Excitation Black -Excitation White +Signal Red -Signal Warranty: Two-year limited Approvals: NTEP 11-024
--	--	---

RL32011WB-L Load Cell Dimensions

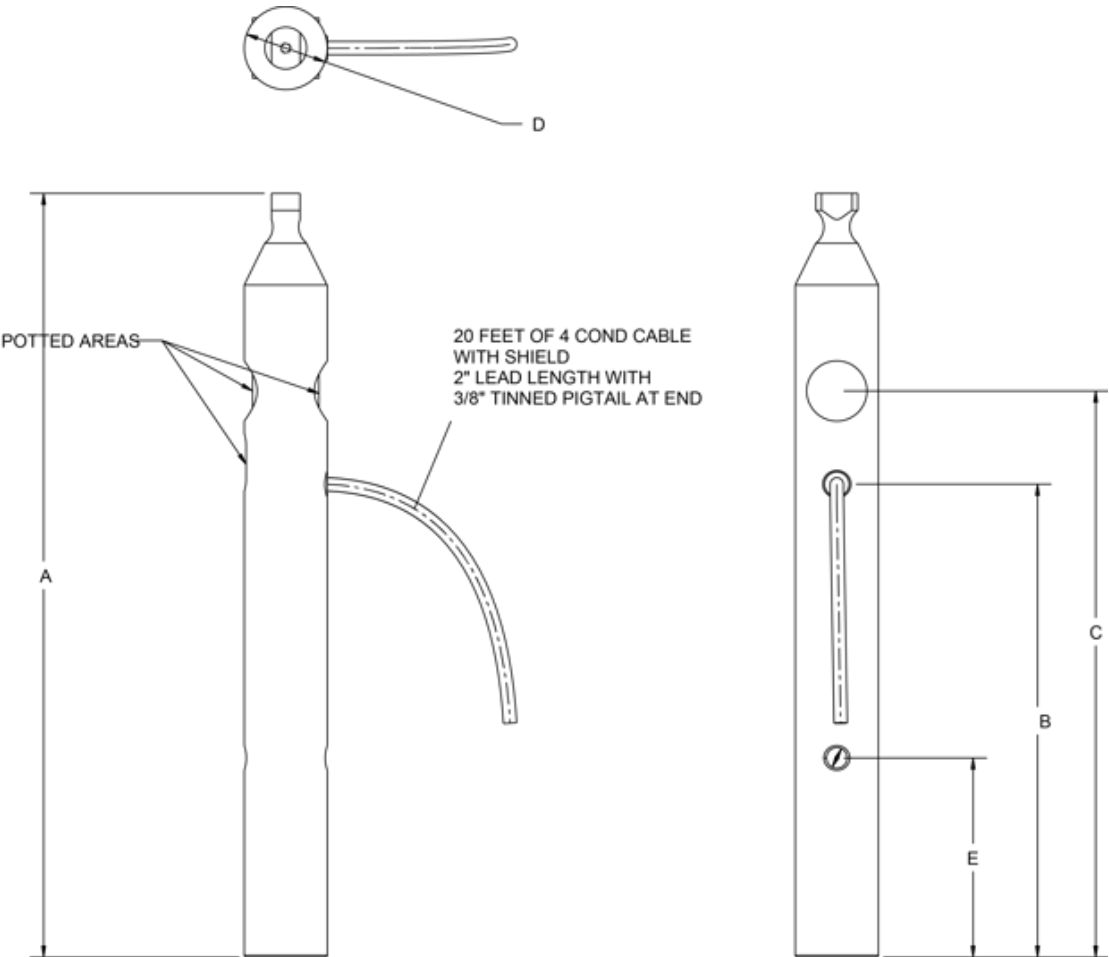

RATED CAPACITY	A	B	C	D	E
LB/IN					
1,250	11.50	7.12	8.52	1.25	3.0
5,000	10.9	5.5	7.4	2.0	3.0
10,000	12.6	5.9	8.0	2.5	3.0

PART #	DESCRIPTION	LIST PRICE
119788	1.25k 1250lb 20ft 2mv/v 350 Ohm SST EW NTEP III 5 M IP67 Link	List Price: \$730.00
119790	5k 5000lb 20ft 2mv/v 350 Ohm SST EW NTEP III 5 M IP67 Link	List Price: \$850.00
119791	10k 10000lb 20ft 2mv/v 350 Ohm SST EW NTEP III 5 M IP67 Link	List Price: \$950.00

www.ricelake.com | 800-472-6703

An ISO 9001 Registered Company ©2026 Rice Lake Weighing Systems